


IN-Stick SF



12mm flat aluminium recessed luminaire LED IN-Stick SF 1130mm 20,4W nw

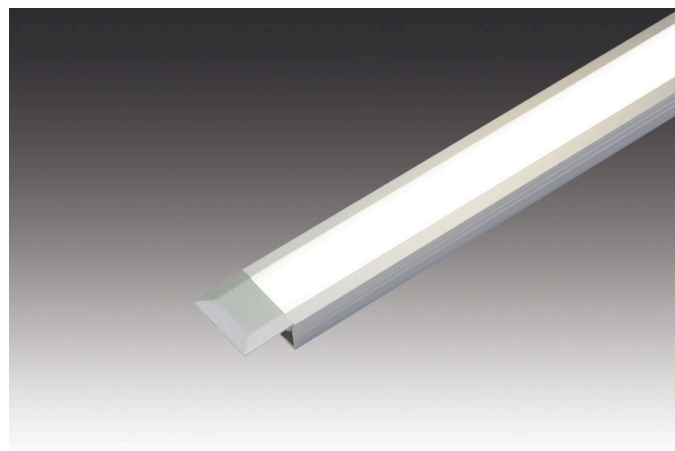

Descripción:

Lean recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 12mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance nw (neutral white) approx. 4000K, optional accessories: dim controller with remote control, DALI or 1-10V


Conexión: LED-Trafo DC 24 V
Vida útil: L70/B10 >= 50.000 h
Lichtfarbe: 4000 K neutral white
Ausstrahlungswinkel: 100°
Eficiencia energética: LED 120 lm/W; luminaire: 842 lm/m (45 lm/W)
Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 93
Zeichen: CE, MM, UL, IP44, SK III
EAN-Nr.: 4051268120395
Gewicht: 0,28 kg

Particularidades:

- only 12 mm depth of the groove
- no visible luminous spots

IN-Stick SF

	100°	Ø	ww	nw
0,5m		560	1184 lx	1268 lx
1,0m		1120	296 lx	317 lx
1,5m		1680	132 lx	141 lx
2,0m		2240	74 lx	79 lx
2,5m		2800	47 lx	51 lx

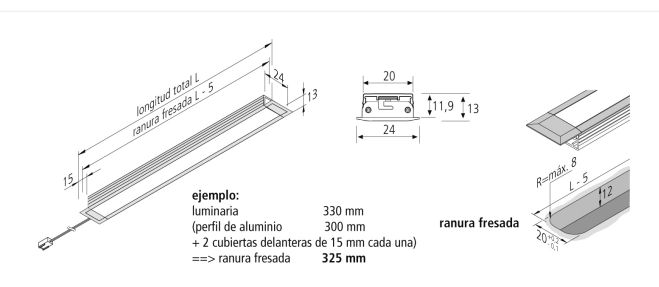

N.º de artículo:
61001550703


disponibilidad restringida probable



Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
61001550102	LED IN-Stick SF 330mm 5,8W ww	3000 K blanco cálido
61001550302	LED IN-Stick SF 530mm 9,6W ww	3000 K blanco cálido
61001550502	LED IN-Stick SF 830mm 15,1W ww	3000 K blanco cálido
61001550702	LED IN-Stick SF 1130mm 20,4W ww	3000 K blanco cálido
61001550103	LED IN-Stick SF 330mm 5,8W nw	4000 K blanco neutro
61001550303	LED IN-Stick SF 530mm 9,6W nw	4000 K blanco neutro
61001550503	LED IN-Stick SF 830mm 15,1W nw	4000 K blanco neutro
61001550703	LED IN-Stick SF 1130mm 20,4W nw	4000 K blanco neutro

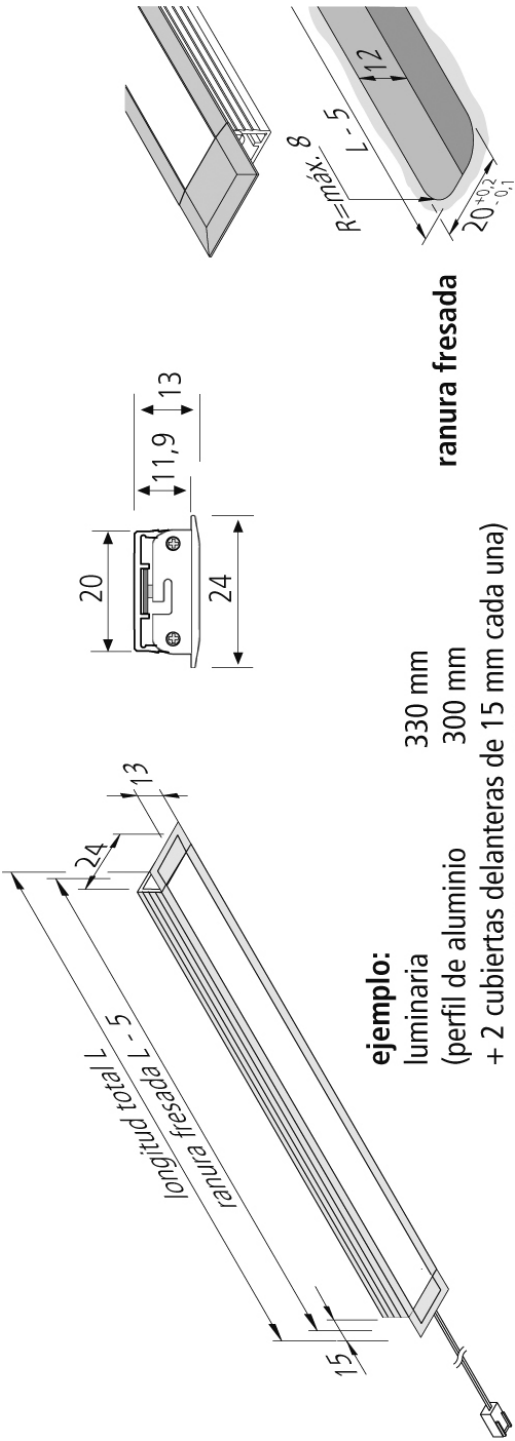

ejemplo:
luminaria
(perfil de aluminio
+ 2 cubiertas delanteras de 15 mm cada una)
==> ranura fresada **325 mm**

ranura fresada

330 mm
300 mm
+ 2 cubiertas delanteras de 15 mm cada una
325 mm