

Pipe F



Luz de construcción de aluminio homogénea, giratoria a 360° LED Pipe F 610mm 11,4W ww



Descripción:

Rotating, rande LED under-cabinet luminaire with homogeneous planar light, housing anodized aluminium, supply cable 25mm with LED 24 plug and connecting cable 25mm with LED 24 socket, easily assembly withtels beiliegenden screws, colour appearance warm white approx.3000K, accessories available: magnet holding clip for Blechassembly, dim controller with radio telecontrol, DALI or 1-10V dim controller with Funkfernbedienung, DALI or 1-10V



Conexión:	LED-Trafo DC 24V
Vida útil:	L70/B10 >= 60.000h
Lichtfarbe:	3000K blanco cálido
Ausstrahlungswinkel:	120°
Eficiencia energética:	LED 107 lm/W; Luminaria: 1100 lm/m (51 lm/W)

Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 95
Zeichen: CE, MM, IP20, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,13 kg

Particularidades:

- LEDs giratorios a 360°
- máx. 60W por línea de conexión
- montaje con tornillos en madera o con soporte magnético como accesorio
- sin puntos de luz visibles

Pipe F

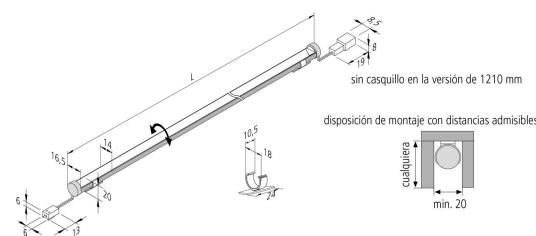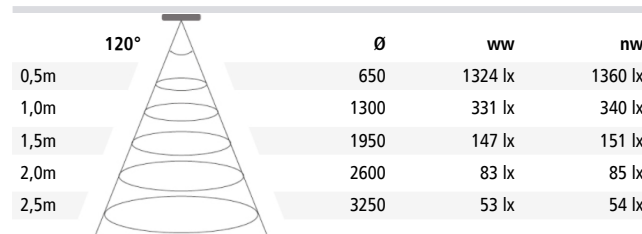

N.º de artículo:
61001610202

disponibilidad restringida probable



Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
61001610102	LED Pipe F 310mm 5,8W ww	3000K blanco cálido
61001610202	LED Pipe F 610mm 11,4W ww	3000K blanco cálido
61001610302	LED Pipe F 910mm 17,0W ww	3000K blanco cálido
61001611402	LED Pipe F 1210mm 22,3W ww	3000K blanco cálido
61001610103	LED Pipe F 310mm 5,8W nw	4000K blanco neutro
61001610203	LED Pipe F 610mm 11,4W nw	4000K blanco neutro
61001610303	LED Pipe F 910mm 17,0W nw	4000K blanco neutro
61001611403	LED Pipe F 1210mm 22,3W nw	4000K blanco neutro

