

IN-Stick MF



Foco empotrado de aluminio plano de 7 mm LED IN-Stick MF 1130mm 20,4W nw



Descripción:

Lean recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 7mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance nw (neutral white) approx. 4000K, optional accessories: dim controller with remote control, DALI or 1-10V

Conexión: LED-Trafo DC 24V
Vida útil: L70/B10 >= 50.000h
Lichtfarbe: 4000K blanco neutro
Ausstrahlungswinkel: 100°
Eficiencia energética: LED 120 lm/W; Luminaria: 1029 lm/m (55 lm/W)


Energieeffizienzklasse: G
Reproducción de colores: Ra/CRI >= 95
Zeichen: CE, MM, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,225 kg

Particularidades:

- solo 7mm de profundidad de fresado
- sin puntos de luz visibles

IN-Stick MF

	100°	Ø	ww	nw
0,5m		560	1444 lx	1548 lx
1,0m		1120	361 lx	387 lx
1,5m		1680	160 lx	172 lx
2,0m		2240	90 lx	97 lx
2,5m		2800	58 lx	62 lx



N.º de artículo:
61002550403



disponibilidad restringida probable



Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
61002550102	LED IN-Stick MF 330mm 5,8W ww	3000K blanco cálido
61002550202	LED IN-Stick MF 530mm 9,6W ww	3000K blanco cálido
61002550302	LED IN-Stick MF 830mm 15,1W ww	3000K blanco cálido
61002550402	LED IN-Stick MF 1130mm 20,4W ww	3000K blanco cálido
61002550103	LED IN-Stick MF 330mm 5,8W nw	4000K blanco neutro
61002550203	LED IN-Stick MF 530mm 9,6W nw	4000K blanco neutro
61002550303	LED IN-Stick MF 830mm 15,1W nw	4000K blanco neutro
61002550403	LED IN-Stick MF 1130mm 20,4W nw	4000K blanco neutro

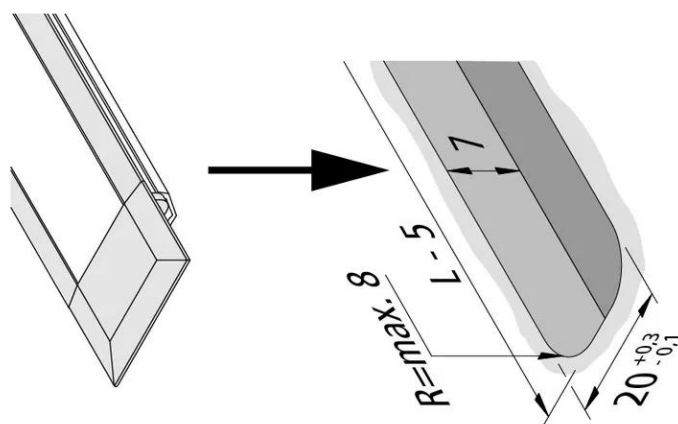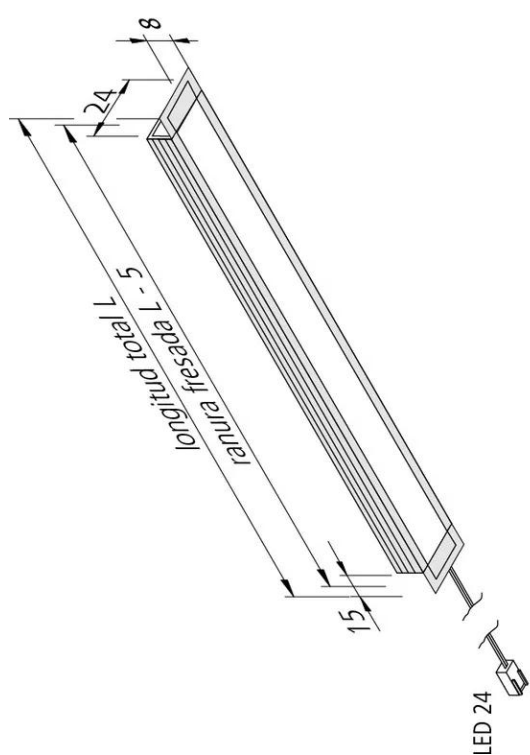

ranura fresada