

## IN-Stick H



Foco empotrado de aluminio potente LED IN-Stick H 830mm 20,0W ww



### Descripción:

Flat recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 12mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance ww (warm white) approx. 3000K, optional accessories: dim controller with remote control, DALI or 1-10V

**Conexión:** LED-Trafo DC 24V  
**Vida útil:** L70/B10 >= 60.000h  
**Lichtfarbe:** 3000K blanco cálido  
**Ausstrahlungswinkel:** 100°  
**Eficiencia energética:** LED 113 lm/W; Luminaria: 1342 lm/m (54 lm/W)


**Energieeffizienzklasse:** G  
**Reproducción de colores:** Ra/CRI >= 95  
**Zeichen:** CE, MM, IP44, SK III  
**EAN-Nr.:** 4,05E+12  
**Gewicht:** 0,33 kg

### Particularidades:

- o solo 12mm de profundidad de fresado
- o versión HR con reflector para iluminación asimétrica

### IN-Stick H

	100°	Ø	ww	nw
0,5m		560	2640 lx	2720 lx
1,0m		1120	660 lx	680 lx
1,5m		1680	293 lx	302 lx
2,0m		2240	165 lx	170 lx
2,5m		2800	106 lx	109 lx

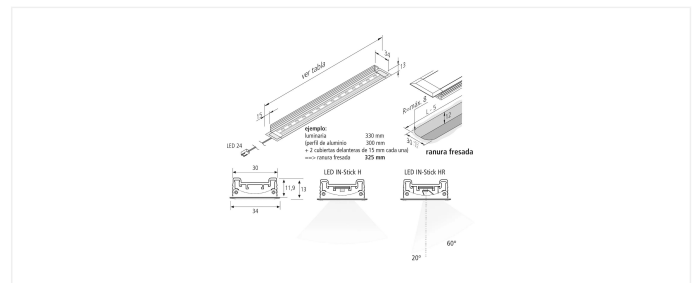

N.º de artículo:  
61001410302

disponibilidad restringida probable

## Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
61001410102	LED IN-Stick H 330mm 7,5W ww	3000K blanco cálido
61001410202	LED IN-Stick H 530mm 12,5W ww	3000K blanco cálido
<b>61001410302</b>	<b>LED IN-Stick H 830mm 20,0W ww</b>	<b>3000K blanco cálido</b>
61001410402	LED IN-Stick H 1130mm 27,5W ww	3000K blanco cálido
61001410101	LED IN-Stick H 330mm 7,5W nw	4000K blanco neutro
61001410201	LED IN-Stick H 530mm 12,5W nw	4000K blanco neutro
61001410301	LED IN-Stick H 830mm 20,0W nw	4000K blanco neutro
61001410401	LED IN-Stick H 1130mm 27,5W nw	4000K blanco neutro

