


Q 68

Flat recessed luminaire square Q 68-LED 2,5W ww stainless steel

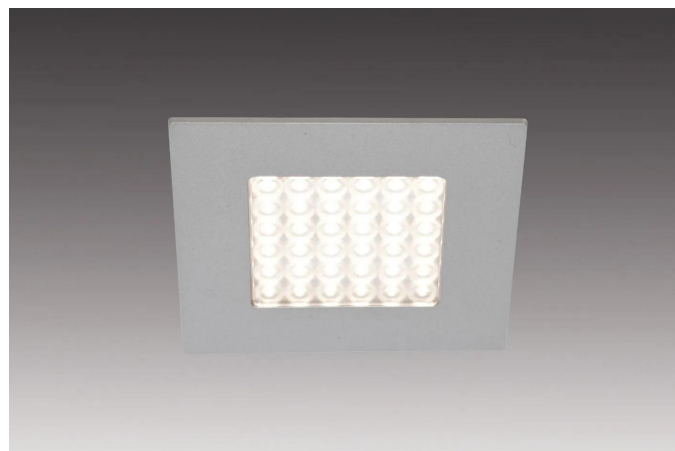

Descrizione:

Square recessed LED spotlight for 68mm bore, plastic housing, connecting cable 2.5m with LED 24-plug, light color warm white approx. 3000K, quick and easy installation with snap-in hooks, optional accessories: dimmable transformer with remote control or 1-10V dimmer, mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole

Collegamento: LED-Trafo DC 24V
Durata: L70/B10 >= 60.000h
Lichtfarbe: 3000K bianco caldo
Ausstrahlungswinkel: 53°
Efficienza energetica: LED: 98 lm/W, luminaire: 185 lm (74 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 93
Zeichen: CE, MM, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,085 kg

Particolarità:

- flush mounting in 16mm panels


R 68 / Q 68

53°	Ø	ww	nw
0,5m	420	652 lx	752 lx
1,0m	840	163 lx	188 lx
1,5m	1260	72 lx	84 lx
2,0m	1680	41 lx	47 lx
2,5m	2100	26 lx	30 lx

Perforazione



68mm



N. articolo:
61001262208

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione
61001262208	Q 68-LED 2,5W ww stainless steel

