


Wall



230V flush-mounted wall recessed luminaire for 68mm hole Wall I Up & Down 1,8W stainless steel

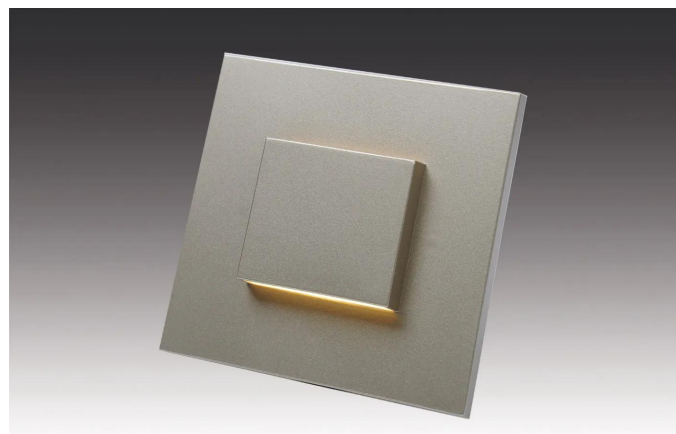

Descrizione:

LED recessed wall light, simple installation in standard flush-mounted and cavity wall boxes, direct connection to 230V with integrated through-wiring, no visible light points; versions "I" with integrated invisible motion detector (run-on time: 3 min.)

Collegamento: 220 - 240V / 50 - 60Hz
Durata: L70/B10 >= 60.000h
Lichtfarbe: 3000K bianco caldo
Ausstrahlungswinkel: 120°
Efficienza energetica: LED: 105 lm/W luminaire: 90 lm (50 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 84
Zeichen: CE, MM, ENEC18, IP20, SK I
EAN-Nr.: 4,05E+12
Gewicht: 0,07 kg


Particolarità:

- quick and easy installation due to standard surface pattress box and flush-mounted socket
- direct connection to 230V
- no visible luminous spots
- decorative rings also available individually NEW: versions "I" with integrated invisible motion detector (run-on time: 3 min.)

Perforazione



68mm



N. articolo:
20202721208

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore esterno	Efficienza energetica
20202720201	Wall F 0,9W white RAL 9016	Bianco	LED: 105 lm/W luminaire: 50 lm (55 lm/W)
20202720208	Wall F 0,9W stainless steel	Aspetto in acciaio inossidabile	LED: 105 lm/W luminaire: 50 lm (55 lm/W)
20202720101	Wall F 1,8W white RAL 9016	Bianco	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202720108	Wall F 1,8W stainless steel	Aspetto in acciaio inossidabile	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202721101	Wall Up & Down 1,8W white RAL 9016	Bianco	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202722101	Wall Down 1,8W white RAL 9016	Bianco	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202722108	Wall Down 1,8W stainless steel	Aspetto in acciaio inossidabile	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202720401	Wall IF 1,8W white RAL 9016	Bianco	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202720408	Wall IF 1,8W stainless steel	Aspetto in acciaio inossidabile	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202721201	Wall I Up & Down 1,8W white RAL 9016	Bianco	LED: 105 lm/W luminaire: 90 lm (50 lm/W)
20202721208	Wall I Up & Down 1,8W stainless steel	Aspetto in acciaio inossidabile	LED: 105 lm/W luminaire: 90 lm (50 lm/W)

