


## Wall



230V flush-mounted wall recessed luminaire for 68mm hole Wall Down 1,8W stainless steel

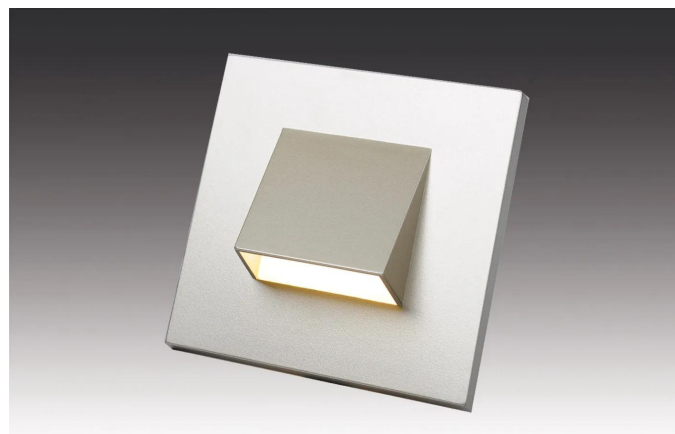

### Descrizione:

LED wall recessed luminaire, easy installation in standard surface pattress box and flush-mounted socket, direct connection to 230V, no visible luminous spot

**Collegamento:** 220 - 240V / 50 - 60Hz  
**Durata:** L70/B10 >= 60.000h  
**Lichtfarbe:** 3000K bianco caldo  
**Ausstrahlungswinkel:** 120°  
**Efficienza energetica:** LED: 105 lm/W luminaire: 90 lm (50 lm/W)  
**Energieeffizienzklasse:** G  
**Resa del colore:** Ra/CRI >= 84  
**Zeichen:** CE, MM, ENEC18, IP20, SK I  
**EAN-Nr.:** 4,05E+12  
**Gewicht:** 0,065 kg


### Particolarità:

- quick and easy installation due to standard surface pattress box and flush-mounted socket
- direct connection to 230V
- no visible luminous spots
- decorative rings also available individually NEW: versions "I" with integrated invisible motion detector (run-on time: 3 min.)

### Perforazione



68mm



**N. articolo:**  
20202722108

Articoli in stock

## Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

| N. articolo        | Denominazione                         | Colore esterno                         | Efficienza energetica                           |
|--------------------|---------------------------------------|----------------------------------------|-------------------------------------------------|
| 20202720201        | Wall F 0,9W white RAL 9016            | Bianco                                 | LED: 105 lm/W luminaire: 50 lm (55 lm/W)        |
| 20202720208        | Wall F 0,9W stainless steel           | Aspetto in acciaio inossidabile        | LED: 105 lm/W luminaire: 50 lm (55 lm/W)        |
| 20202720101        | Wall F 1,8W white RAL 9016            | Bianco                                 | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |
| 20202720108        | Wall F 1,8W stainless steel           | Aspetto in acciaio inossidabile        | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |
| 20202721101        | Wall Up & Down 1,8W white RAL 9016    | Bianco                                 | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |
| 20202722101        | Wall Down 1,8W white RAL 9016         | Bianco                                 | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |
| <b>20202722108</b> | <b>Wall Down 1,8W stainless steel</b> | <b>Aspetto in acciaio inossidabile</b> | <b>LED: 105 lm/W luminaire: 90 lm (50 lm/W)</b> |
| 20202720401        | Wall IF 1,8W white RAL 9016           | Bianco                                 | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |
| 20202720408        | Wall IF 1,8W stainless steel          | Aspetto in acciaio inossidabile        | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |
| 20202721201        | Wall I Up & Down 1,8W white RAL 9016  | Bianco                                 | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |
| 20202721208        | Wall I Up & Down 1,8W stainless steel | Aspetto in acciaio inossidabile        | LED: 105 lm/W luminaire: 90 lm (50 lm/W)        |

