

Accessori Faretti da incasso

Adapter ring SR 68 square matt chrome



Foto: Mr. Timber / Ilona Müller


Descrizione:

Adapter ring square for mounting in drill holes up to 84 mm

Zeichen: CE, MM

EAN-Nr.: 4,05E+12

Gewicht: 0,029 kg

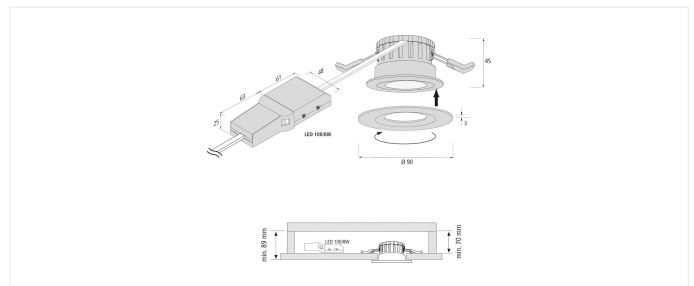

N. articolo:
20501021416

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Diametro foro	Colore esterno	Collegamento
20501021506	Mounting ring R 55 matt chrome	-	-	-
20501021508	Mounting ring R 55 stainless steel	-	-	-
20501021106	Mounting ring R 68 matt chrome	-	-	-
20501021108	Mounting ring R 68 stainless steel look	-	-	-
20501021803	Mounting ring R 68 black	-	-	-
20501021206	Mounting ring Q 68 matt chrome	-	-	-
20501021208	Mounting ring Q 68 stainless steel look	-	-	-
20501021203	Mounting ring Q 68 black	-	-	-
61500030121	Mounting spring AR 35	-	-	-
61500030111	Mounting spring AR 45	-	-	-
61500030101	Mounting spring AR/AQ/FAR/FAQ/ 68-78	68-78mm	-	-
61500030131	Mounting spring HV 68/78	68-78mm	-	-
20501021406	Adapter ring SR 68 round matt chrome	-	-	-
20501021408	Adapter ring SR 68 round stainless steel look	-	-	-
20501021401	Adapter ring SR 68 round white	-	-	-
20501021416	Adapter ring SR 68 square matt chrome	-	-	-
20501021418	Adapter ring SR 68 square stainless steel	-	-	-
20501021411	Adapter ring SR 68 square white	-	-	-
20501021908	Mounting ring AR 68 stainless steel	-	-	-
20501021903	Mounting ring AR 68 black	-	-	-
20501022008	Mounting ring AQ 68 stainless steel	-	-	-
20501022003	Mounting ring AQ 68 black	-	-	-
20501022108	Mounting ring AR 58 stainless steel look	-	Aspetto in acciaio inossidabile	-
20501022103	Mounting ring AR 58 black	-	Nero	-
20501022201	Decor ring Eco R 68 round white	-	Bianco	-
20501022203	Decor ring Eco R 68 round black	-	Nero	220 - 240V / 50 - 60Hz
20501022204	Decor ring Eco R 68 round chrome	-	Cromato opaco	220 - 240V / 50 - 60Hz
20501022208	Decor ring Eco R 68 round stainless steel look	-	Aspetto in acciaio inossidabile	220 - 240V / 50 - 60Hz

