

FAQ 58



12mm flat metal recessed furniture luminaire square, pluggable set of 3 FAQ 58-LED 3W nw stainless steel look



Descrizione:

LED recessed downlights with surface light as a set of 3, metal housing, connecting cable 2.5m with LED 24 plug can be plugged into the downlight, light color neutral white approx. 4000K, incl. ready-to-plug 15W transformer, quick and easy installation by snap hooks, optional accessories: Dimm controller with radio remote control, Alexa, WiFi, DALI, ZigBee, Casambi, sonar or 1-10V dimmer


Collegamento: LED-Trafo DC 24V
Durata: L70/B10 >= 60.000h
Lichtfarbe: 4000K bianco neutro
Ausstrahlungswinkel: 115°
Efficienza energetica: LED: 120 lm/W; luminaire: 225 lm (75 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 93
Zeichen: CE, MM, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,47 kg

Particolarità:

- housing in metal construction
- flush mounting in 16mm panels
- no visible luminous spots

FAQ 58


	115°	Ø	ww	nw
0,5m		640	352 lx	376 lx
1,0m		1280	88 lx	94 lx
1,5m		1920	39 lx	42 lx
2,0m		2560	22 lx	24 lx
2,5m		3200	14 lx	15 lx



Perforazione



58mm



In caso di isolamento utilizzare distanziatori a min. 50 mm




N. articolo:
61060431003

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore della luce
20203158002	FAQ 58-LED 3W ww stainless steel look	3000K bianco caldo
61060431002	set of 3 FAQ 58-LED 3W ww stainless steel look	3000K bianco caldo
61060431003	set of 3 FAQ 58-LED 3W nw stainless steel look	4000K bianco neutro
61060451002	set of 5 FAQ 58-LED 3W ww stainless steel look	3000K bianco caldo
61060451003	set of 5 FAQ 58-LED 3W nw stainless steel look	4000K bianco neutro
20203153003	FAQ 58-LED 3W nw black	4000K bianco neutro
61060431302	set of 3 FAQ 58-LED 3W ww black	3000K bianco caldo
61060451302	set of 5 FAQ 58-LED 3W ww black	3000K bianco caldo

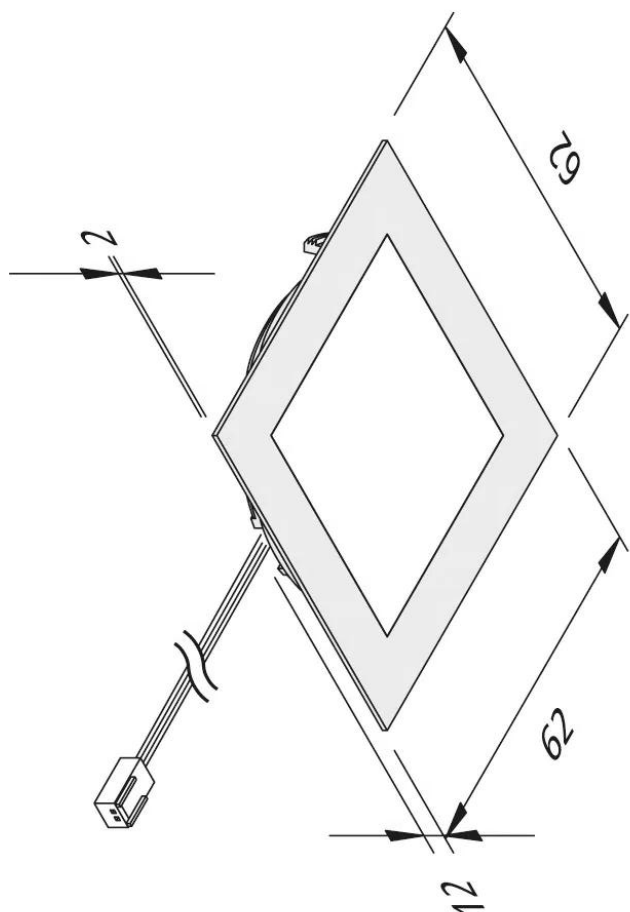

in caso di isolamento utilizzare distanziatori a min. 50 mm

