


AR 68



Flat recessed luminaire with metal casing AR 68-LED 4W ww black

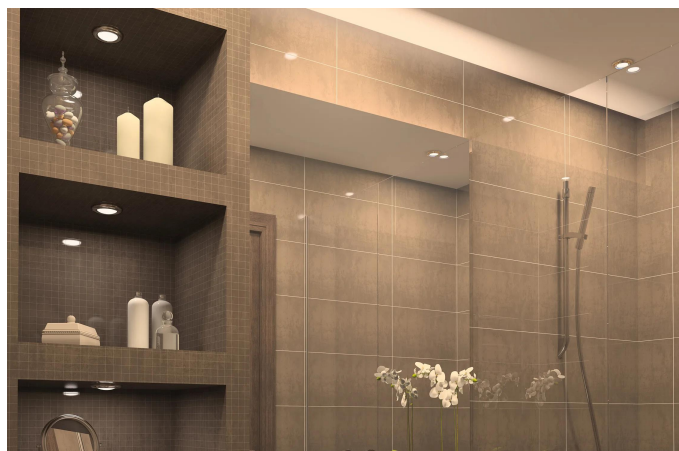

Descrizione:

LED recessed luminaire with low glare, metal housing, supply cable 2.5m with LED 24 plug for direct plug-in connection at the spotlight, colour appearance extra warm white approx. 2700K, quick and easy installation with snap-in hook, optional accessories: dim controller with radio remote control, Alexa, WiFi, DALI, ZigBee, Casambi, Sonar or 1-10V dimmer, mounting spring to screw on for the use in lightweight ceilings

Collegamento: LED-Trafo DC 24V
Durata: L70/B10 >= 60.000h
Lichtfarbe: 3000K bianco caldo
Ausstrahlungswinkel: 60°
Efficienza energetica: LED: 120 lm/W; luminaire: 300 lm (75 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 93
Zeichen: CE, MM, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,079 kg

Particolarità:

- metal casing
- flush mounting in 16mm panels
- glare-free with recessed reflector and clear diffuser


AR 68

60°	Ø	xw	ww	nw
0,5m	425	1008 lx	1080 lx	1156 lx
1,0m	850	252 lx	270 lx	289 lx
1,5m	1275	112 lx	120 lx	128 lx
2,0m	1700	63 lx	68 lx	72 lx
2,5m	2125	40 lx	43 lx	46 lx

Perforazione



68mm

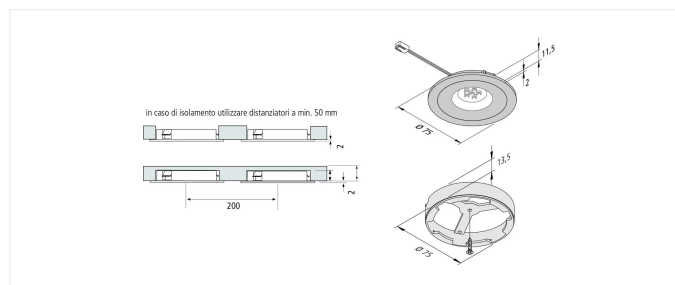


N. articolo:
20203233002

Articoli in stock

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore esterno	Colore della luce
20203233004	AR 68-LED 4W xw black	Nero	2700K bianco extra caldo
20203238004	AR 68-LED 4W xw stainless steel look	Aspetto in acciaio inossidabile	2700K bianco extra caldo
20203233002	AR 68-LED 4W ww black	Nero	3000K bianco caldo
20203238002	AR 68-LED 4W ww stainless steel look	Aspetto in acciaio inossidabile	3000K bianco caldo
20203233003	AR 68-LED 4W nw black	Nero	4000K bianco neutro
20203238003	AR 68-LED 4W nw stainless steel look	Aspetto in acciaio inossidabile	4000K bianco neutro

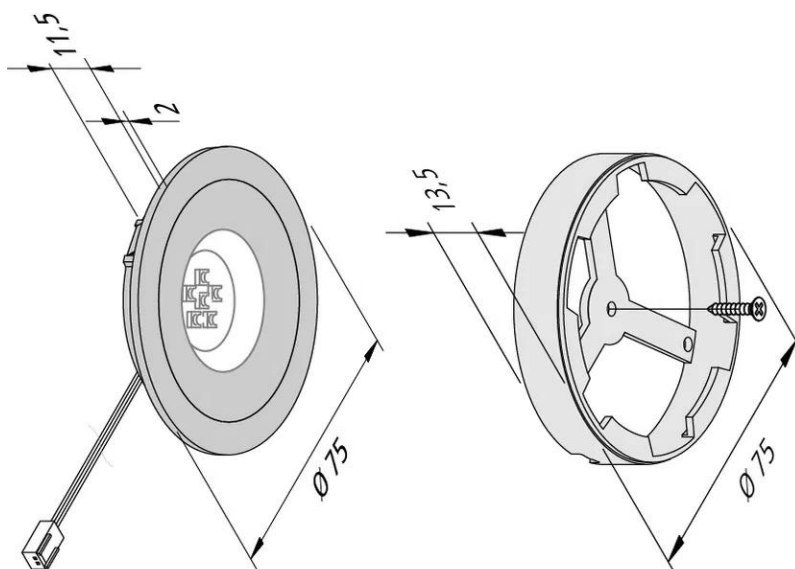

in caso di isolamento utilizzare distanziatori a min. 50 mm

