

AR 78 / AQ 78



Powerful, flat aluminium recessed luminaire round AR 78-LED 7,5W nw black



Descrizione:

LED recessed spotlight, aluminum housing, connecting cable 2.5m with LED 24-plug, light color neutral white approx. 4000K, quick and easy installation with snap-in hooks, optional accessories: dimming controller with radio remote control, WiFi app, DALI or 1-10V dimmer, mounting spring for screwing on for secure hold in lightweight ceilings

Collegamento: LED-Trafo DC 24V
Durata: L70/B10 >= 60.000h
Lichtfarbe: 4000K bianco neutro
Ausstrahlungswinkel: 80°
Efficienza energetica: LED: 90 lm/W; luminaire: 450 lm (60 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 98
Zeichen: CE, MM, UL, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,115 kg

Particolarità:

- flush mounting in 16mm panels
- metal casing
- genuine glass cover
- with mounting spring also ideal for the use in plasterboard ceilings
- glare-free with recessed reflector and clear diffuser


AR 78 / AQ 78

	80°	Ø	ww	nw
0,5m		500	888 lx	960 lx
1,0m		1000	222 lx	240 lx
1,5m		1500	99 lx	107 lx
2,0m		2000	56 lx	60 lx
2,5m		2500	36 lx	38 lx

Perforazione



78mm

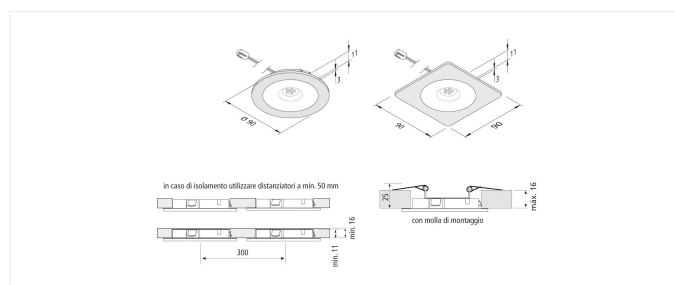




N. articolo:
61001430303

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore esterno	Colore della luce
61001430201	AR 78-LED 7,5W ww white	Bianco	3000K bianco caldo
61001430203	AR 78-LED 7,5W ww black	Nero	3000K bianco caldo
61001430208	AR 78-LED 7,5W ww stainless steel look	Aspetto in acciaio inossidabile	3000K bianco caldo
61001430301	AR 78-LED 7,5W nw white	Bianco	4000K bianco neutro
61001430303	AR 78-LED 7,5W nw black	Nero	4000K bianco neutro
61001430308	AR 78-LED 7,5W nw stainless steel look	Aspetto in acciaio inossidabile	4000K bianco neutro

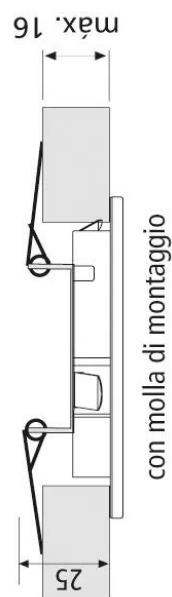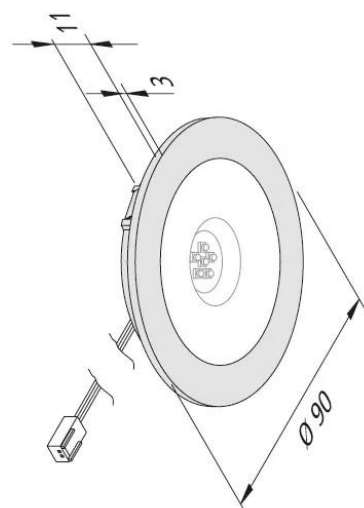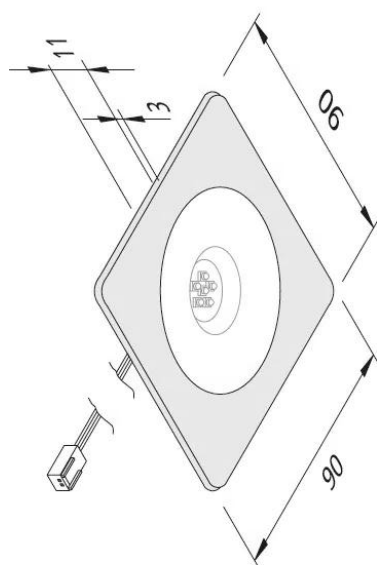

con molla di montaggio

in caso di isolamento utilizzare distanziatori a min. 50 mm

