

## Dynamic SR 68



Swivel and tilt recessed ceiling spotlight with adjustable colour appearance Dynamic SR 68-LED 6,5W white



### Descrizione:

Swiveling LED recessed spotlight, metal housing, connecting cable 2.5m with dynamic plug, light color adjustable between approx. 2700K and 5000K, quick and easy mounting by spring terminals, control via various radio remote controls, DALI or WiFi controller

**Collegamento:** LED-Trafo DC 24V  
**Durata:** L70/B10 >= 50.000h  
**Lichtfarbe:** 2700 - 5000K (Dynamic) regolabile  
**Ausstrahlungswinkel:** 40°  
**Efficienza energetica:** LED: 105 lm/W; luminaire: 420 lm (65 lm/W)  
**Energieeffizienzklasse:** G  
**Resa del colore:** Ra/CRI >= 90  
**Zeichen:** CE, MM, IP44, UGR<19, SK III  
**EAN-Nr.:** 4,05E+12  
**Gewicht:** 0,145 kg

### Particolarità:

- swivels and tilts 20° to both sides
- metal casing
- colour appearance adjustable between 2700K (xw) and 5000K (cw)
- suitable for screen workplaces! (UGR < 19)


### Dynamic SR 68

40°	Ø	xw	nw	cw
0,5m	300	2960 lx	3160 lx	3400 lx
1,0m	600	740 lx	790 lx	850 lx
1,5m	900	329 lx	351 lx	378 lx
2,0m	1200	185 lx	198 lx	213 lx
2,5m	1500	118 lx	126 lx	136 lx

### Perforazione



68-74mm (ohne Ring)  
68-84mm (mit Ring)

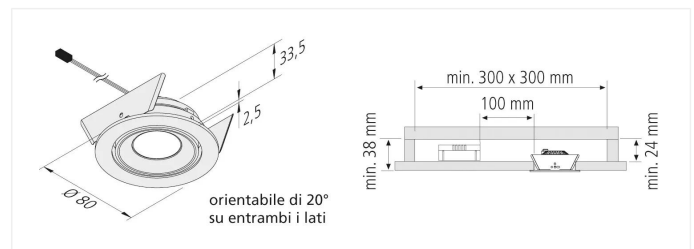

**N. articolo:**  
20202750101

Articoli in stock

## Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore esterno
20202750108	Dynamic SR 68-LED 6,5W stainless steel look	Aspetto in acciaio inossidabile
20202750106	Dynamic SR 68-LED 6,5W matt chrome	Cromato opaco
20202750101	Dynamic SR 68-LED 6,5W white	Bianco

