

IN-Stick SF



12mm flat aluminium recessed luminaire LED IN-Stick SF 1130mm 20,4W nw




Descrizione:

Lean recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 12mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance nw (neutral white) approx. 4000K, optional accessories: dim controller with remote control, DALI or 1-10V

Collegamento: LED-Trafo DC 24 V
Durata: L70/B10 >= 50.000 h
Lichtfarbe: 4000 K neutral white
Ausstrahlungswinkel: 100°
Efficienza energetica: LED 120 lm/W; luminaire: 842 lm/m (45 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 93
Zeichen: CE, MM, UL, IP44, SK III
EAN-Nr.: 4051268120395
Gewicht: 0,28 kg


Particolarità:

- only 12 mm depth of the groove
- no visible luminous spots

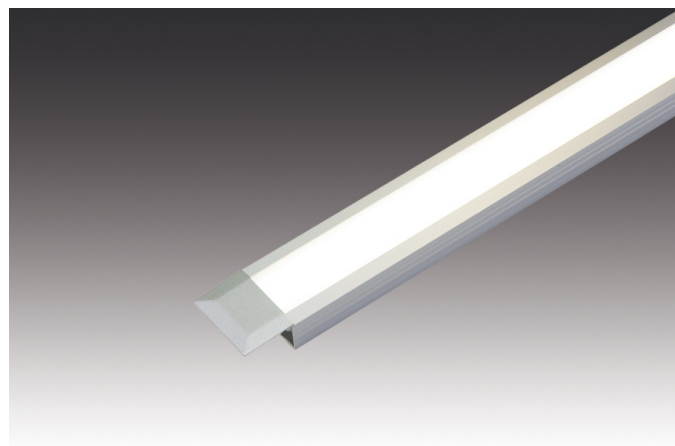

IN-Stick SF

	100°	Ø	ww	nw
0,5m		560	1184 lx	1268 lx
1,0m		1120	296 lx	317 lx
1,5m		1680	132 lx	141 lx
2,0m		2240	74 lx	79 lx
2,5m		2800	47 lx	51 lx

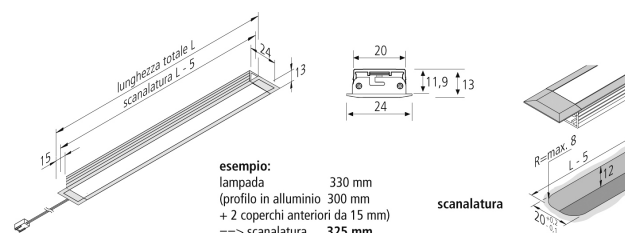

N. articolo:
61001550703


eventualmente disponibili in quantità limitata



Versioni disponibili

Seegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore della luce
61001550102	LED IN-Stick SF 330mm 5,8W ww	3000 K bianco caldo
61001550302	LED IN-Stick SF 530mm 9,6W ww	3000 K bianco caldo
61001550502	LED IN-Stick SF 830mm 15,1W ww	3000 K bianco caldo
61001550702	LED IN-Stick SF 1130mm 20,4W ww	3000 K bianco caldo
61001550103	LED IN-Stick SF 330mm 5,8W nw	4000 K bianco neutro
61001550303	LED IN-Stick SF 530mm 9,6W nw	4000 K bianco neutro
61001550503	LED IN-Stick SF 830mm 15,1W nw	4000 K bianco neutro
61001550703	LED IN-Stick SF 1130mm 20,4W nw	4000 K bianco neutro

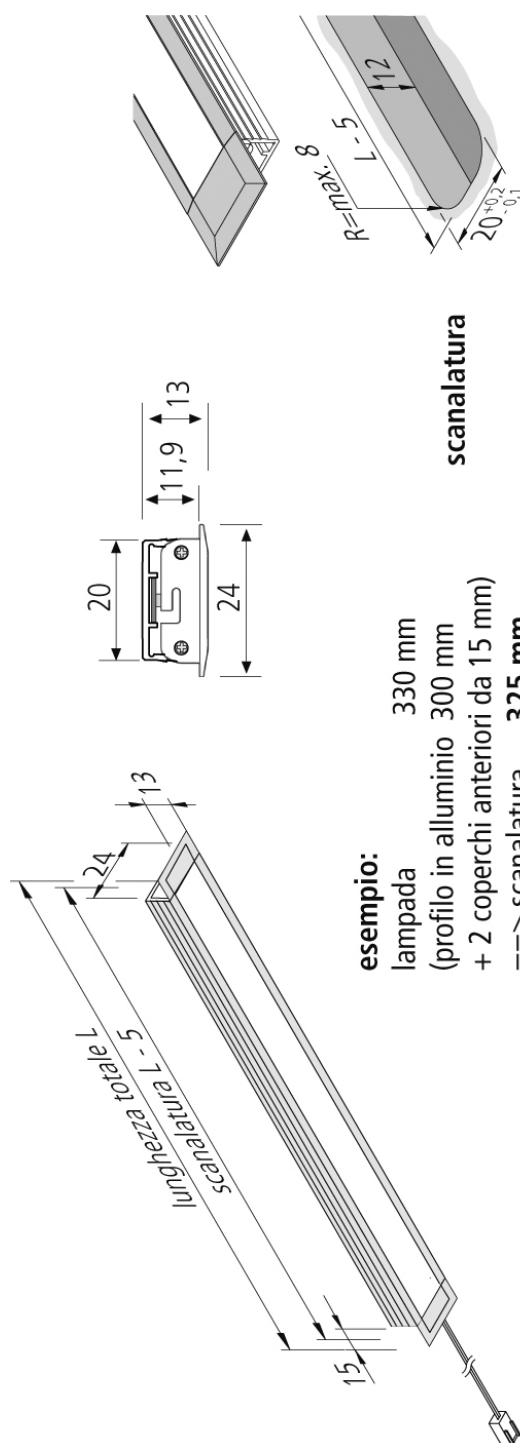

esempio:
lampada 330 mm
(profilo in alluminio 300 mm
+ 2 coperchi anteriori da 15 mm)
==> scanalatura **325 mm**

scanalatura