

IN-Stick MF



Faretto incassato in alluminio piatto da 7 mm LED IN-Stick MF 1130mm 20,4W nw



Descrizione:

Lean recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 7mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance nw (neutral white) approx. 4000K, optional accessories: dim controller with remote control, DALI or 1-10V

Collegamento: LED-Trafo DC 24V
Durata: L70/B10 >= 50.000h
Lichtfarbe: 4000K bianco neutro
Ausstrahlungswinkel: 100°
Efficienza energetica: LED 120 lm/W; Apparecchio: 1029 lm/m (55 lm/W)

Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 95
Zeichen: CE, MM, IP44, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,225 kg


Particolarità:

- o solo 7mm di profondità di fresatura
- o nessun punto luce visibile



IN-Stick MF

	100°	Ø	ww	nw
0,5m		560	1444 lx	1548 lx
1,0m		1120	361 lx	387 lx
1,5m		1680	160 lx	172 lx
2,0m		2240	90 lx	97 lx
2,5m		2800	58 lx	62 lx

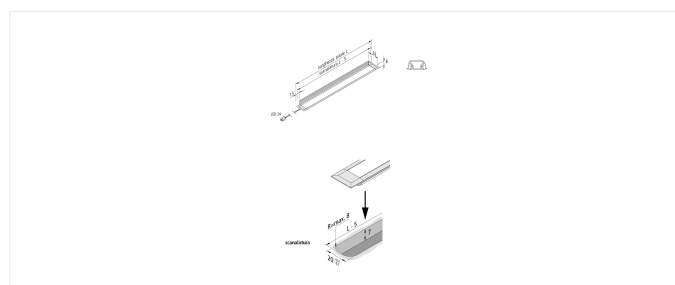

N. articolo:
61002550403



eventualmente disponibili in quantità limitata



Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore della luce
61002550102	LED IN-Stick MF 330mm 5,8W ww	3000K bianco caldo
61002550202	LED IN-Stick MF 530mm 9,6W ww	3000K bianco caldo
61002550302	LED IN-Stick MF 830mm 15,1W ww	3000K bianco caldo
61002550402	LED IN-Stick MF 1130mm 20,4W ww	3000K bianco caldo
61002550103	LED IN-Stick MF 330mm 5,8W nw	4000K bianco neutro
61002550203	LED IN-Stick MF 530mm 9,6W nw	4000K bianco neutro
61002550303	LED IN-Stick MF 830mm 15,1W nw	4000K bianco neutro
61002550403	LED IN-Stick MF 1130mm 20,4W nw	4000K bianco neutro

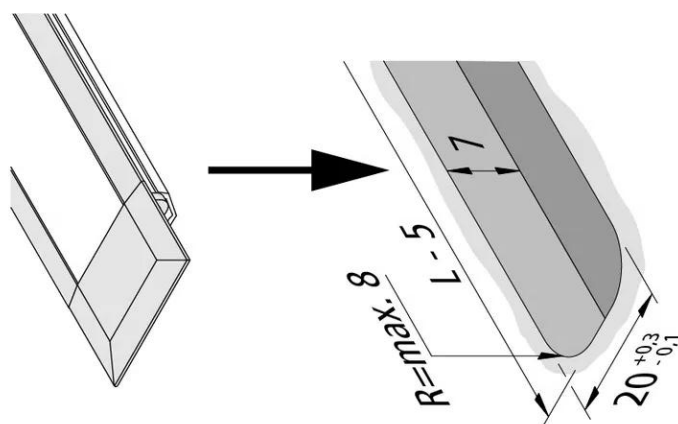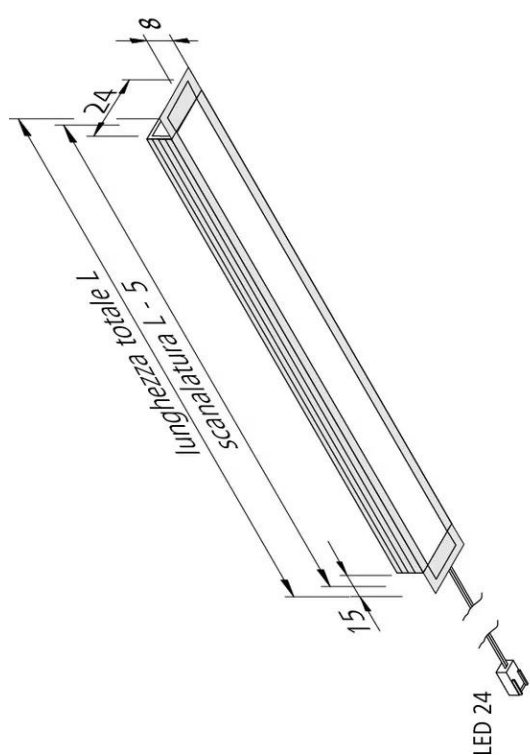

scanalatura