

SlimLite® CS LED HO+



Lampada lineare in alluminio 230V potente e ruotabile a 180° SlimLite CS LED HO+ 595mm 13,8W ww



Descrizione:

LED linear luminarie for 230V, rotating 180°, rigid connectors for minimum spacing between luminaires, vertical plug-in system allows later removal from the strip light, solid aluminium casing, easy mounting through enclosed clips, many accessories like horizontal or vertical connection line distributor and flush-type sockets with with small (7,5mm diameter) high-voltage plug-in system ready for connection with Tyco AMP, corner mounting clips 45° or angle mounting clips 90°, colour appearance warm white appr.3000K

Collegamento: 220 - 240V / 50 - 60Hz
Durata: L70/B10 >= 60.000h
Lichtfarbe: 3000K bianco caldo
Efficienza energetica: LED 120 lm/W; Apparecchio: 1670 lm/m (100 lm/W)
Energieeffizienzklasse: E
Resa del colore: Ra/CRI >= 95
Zeichen: CE, MM, IP20, SK II
EAN-Nr.: 4,05E+12
Gewicht: 0,4 kg


Particolarità:

- LED rotabili di 180°
- Connettore rigido per spazi minimi tra le luci
- Sistema di innesto verticale consente la rimozione successiva dalla barra luminosa
- Ampia gamma di accessori



SlimLite® CS LED HO+

	110°	Ø	xw	ww	nw
0,5m		610	2600 lx	2700 lx	2880 lx
1,0m		1220	650 lx	675 lx	720 lx
1,5m		1830	289 lx	300 lx	320 lx
2,0m		2440	163 lx	169 lx	180 lx
2,5m		3050	104 lx	108 lx	115 lx



N. articolo:
61001292102

Articoli in stock


Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.


N. articolo	Denominazione	Colore della luce
61001292004	SlimLite CS LED HO+ 335mm 5,8W xw	2700K bianco extra caldo
61001292104	SlimLite CS LED HO+ 595mm 13,8W xw	2700K bianco extra caldo
61001292204	SlimLite CS LED HO+ 895mm 18,0W xw	2700K bianco extra caldo
61001292304	SlimLite CS LED HO+ 1195mm 24,7W xw	2700K bianco extra caldo
61001292002	SlimLite CS LED HO+ 335mm 5,8W ww	3000K bianco caldo
61001292102	SlimLite CS LED HO+ 595mm 13,8W ww	3000K bianco caldo
61001292202	SlimLite CS LED HO+ 895mm 18,0W ww	3000K bianco caldo
61001292302	SlimLite CS LED HO+ 1195mm 24,7W ww	3000K bianco caldo
61001292001	SlimLite CS LED HO+ 335mm 5,8W nw	4000K bianco neutro
61001292101	SlimLite CS LED HO+ 595mm 13,8W nw	4000K bianco neutro
61001292201	SlimLite CS LED HO+ 895mm 18,0W nw	4000K bianco neutro
61001292301	SlimLite CS LED HO+ 1195mm 24,7W nw	4000K bianco neutro

potenza lampadina	Numero LED	Lunghezza L	Lunghezza L1	numero*
5,8W HE+	24	595	583	28
8,9W HE+	36	895	883	28
10,3W HE+	48	1195	1183	28
5,8W HO+	18	335	323	28
13,8W HO+	36	595	583	28
18,0W HO+	52	895	883	22
24,7W HO+	72	1195	1183	13


* Numero massimo consentito di lampade per nastro luminoso (massimo 3 nastri luminosi, ripartire da 6 HVLC V max 2,5A totale) su un interruttore automatico N da 16A, ad un polo, tipo B

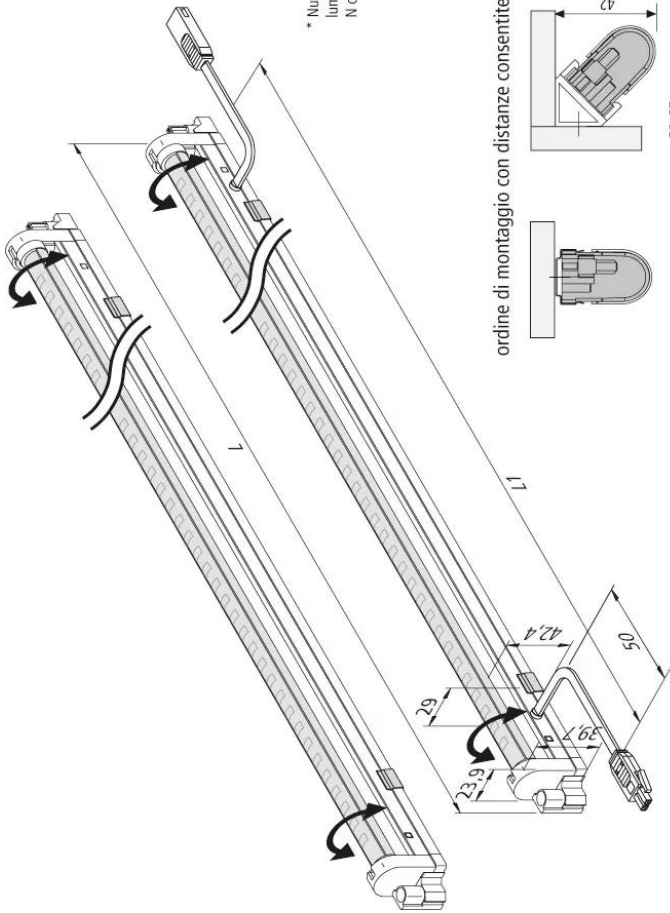


ordine di montaggio con distanze consentite




CS CM
versione in metallo



CS CE
montaggio angolare



CS CW
montaggio angolare



montaggio



HVLC 43

HVLC 42

HVLC 46

HVLC 46

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

montaggio

HVLC 43

HVLC 42

HVLC 46

HVLC 46

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm



CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

lunghezza totale = (quantità x L1) + 12 mm

CSK

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT

IN

OUT