

Dynamic Modulite F



230V under cabinet kitchen luminaire with adjustable colour appearance Dynamic LED ModuLite F 1200mm 18W anodized aluminium



Descrizione:

Flat LED under cabinet luminaire 230V, housing anodized aluminium, easy installation (screw-through), very small plug ($\varnothing = 7,5\text{mm}$), high-voltage-plug-in system by Tyco AMP, colour appearance adjustable between approx. 2700K (xw) and 5000K (cw) with different remote controls


Collegamento: 220 - 240V / 50 - 60Hz
Durata: L70/B10 $\geq 60.000\text{h}$
Lichtfarbe: 2700 - 5000K (Dynamic) regolabile
Ausstrahlungswinkel: 120°
Efficienza energetica: LED: 122 lm/W; luminaire: 1583 lm/m (95 lm/W)
Energieeffizienzklasse: E
Resa del colore: Ra/CRI ≥ 90
Zeichen: CE, MM, IP20, SK II
EAN-Nr.: 4,05E+12
Gewicht: 0,52 kg

Particolarità:

- integrated HVLCS plug and socket in casing for uninterrupted strip lights (max. 300W)
- no visible luminous spots
- with integrated Dynamic controller
- dimmbale
- colour appearance adjustable between approx. 2700K (xw) and 5000K (cw) with different remote controls

Dynamic ModuLite F

	120°	Ø	xw	cw
0,5m		610	2320 lx	2440 lx
1,0m		1220	580 lx	610 lx
1,5m		1830	258 lx	271 lx
2,0m		2440	145 lx	153 lx
2,5m		3050	93 lx	98 lx

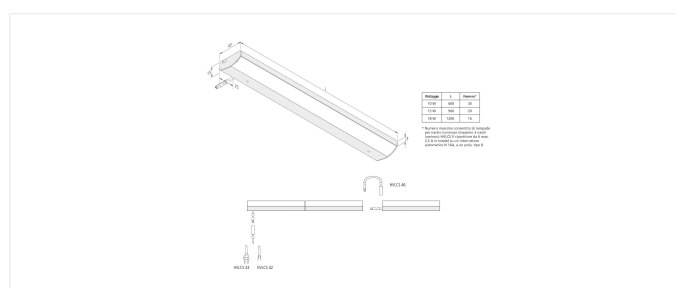


N. articolo:
20202583401

Articoli in stock

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore esterno
20202583202	Dynamic LED ModuLite F 600mm 10W white	Bianco
20202583302	Dynamic LED ModuLite F 900mm 15W white	Bianco
20202583402	Dynamic LED ModuLite F 1200mm 18W white	Bianco
20202583203	Dynamic LED ModuLite F 600mm 10W black	Nero
20202583303	Dynamic LED ModuLite F 900mm 15W black	Nero
20202583403	Dynamic LED ModuLite F 1200mm 18W black	Nero
20202583201	Dynamic LED ModuLite F 600mm 10W anodized aluminium	Alluminio anodizzato
20202583301	Dynamic LED ModuLite F 900mm 15W anodized aluminium	Alluminio anodizzato
20202583401	Dynamic LED ModuLite F 1200mm 18W anodized aluminium	Alluminio anodizzato

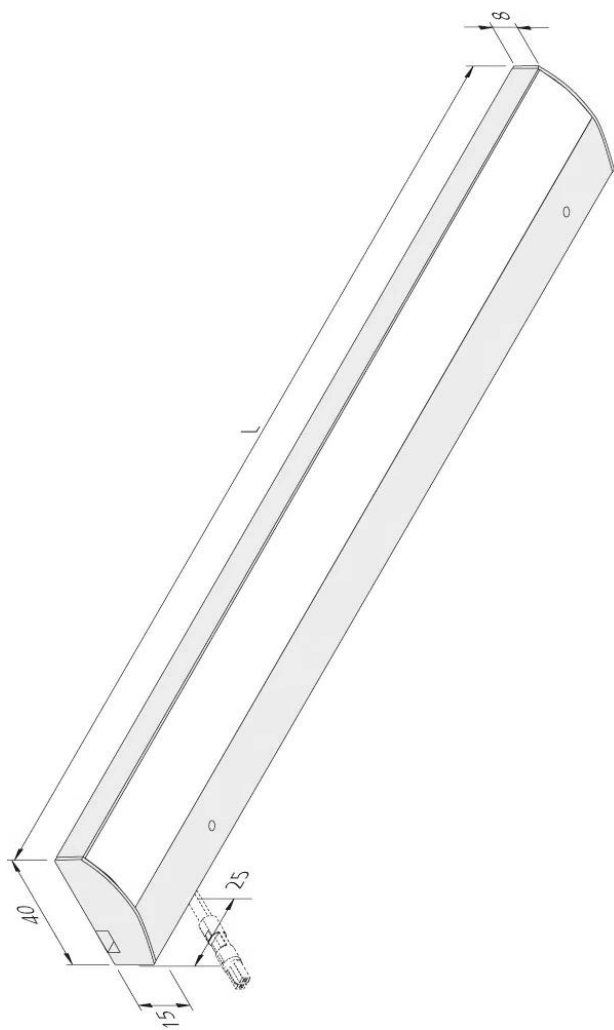

Wattaggio	L	Numero*
10 W	600	30
15 W	900	20
18 W	1200	16

* Numero massimo consentito di lampade per nastro luminoso (massimo 3 nastri luminosi; HVLCs V ripartitore da 6 max. 2,5 A in totale) su un interruttore automatico N 16A, a un polo, tipo B

