


Motion sensor



Furniture and ceiling installation Mini Motion Sensor PIR 2S

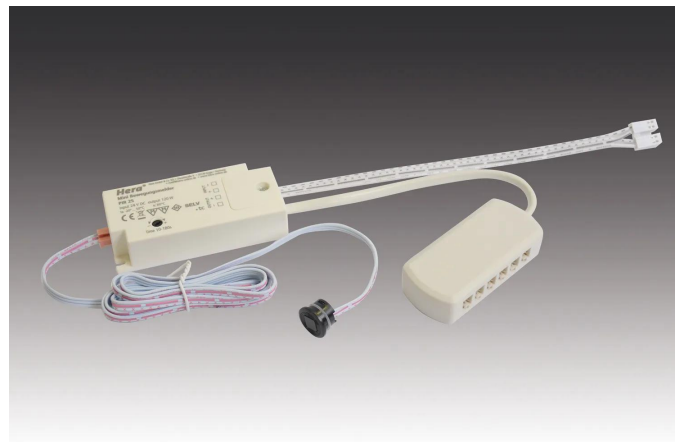

Description:

mini motion sensor for connection of LED 24V luminaires, connecting cable 0,2m with LED 24 plug, switching cable 0,2m with 11-way distributor, sensor cable 1,4m, installation of the sensor for 20mm cut out, detection angle 80°, detection range 2.5m with mounting height of 1-2m

Connection: LED-Trafo DC 24V

Symbols: CE, MM, IP20, SK III

EAN-No.: 4,05E+12

Weight: 0,07 kg


Special features:

- adjustable follow-up time: 10 sec to 3 min.
- to be connected on secondary side between LED 24V transformer and LED 24V luminaire (max. 60W)

Drilling hole



13mm



Order number:
21703230202

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	protection class	connection	drilling diameter
61500051011	Mini Motion Sensor PIR 3	SK3	LED-Trafo DC 24V	-
20870070011	Radio sensor head PIR 3 matt chrome	-	-	-
61500051021	Mini Motion Sensor PIR 4 60W with 2 solder bridges	-	LED-Trafo DC 24V	-
21703230102	Mini Motion Sensor PIR 1S	SK2	220 - 240V / 50 - 60Hz	13mm
21703230202	Mini Motion Sensor PIR 2S	SK3	LED-Trafo DC 24V	13mm

