


Motion sensor



Furniture and ceiling installation Mini Motion Sensor PIR 2S

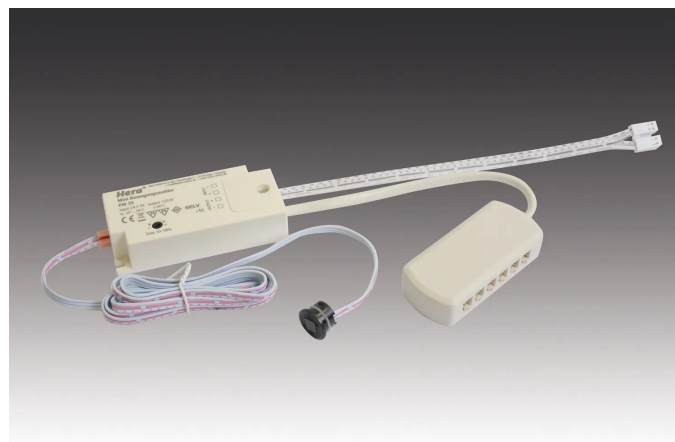

Descrizione:

mini motion sensor for connection of LED 24V luminaires, connecting cable 0,2m with LED 24 plug, switching cable 0,2m with 11-way distributor, sensor cable 1,4m, installation of the sensor for 20mm cut out, detection angle 80°, detection range 2.5m with mounting height of 1-2m

Collegamento: LED-Trafo DC 24V

Zeichen: CE, MM, IP20, SK III

EAN-Nr.: 4,05E+12

Gewicht: 0,07 kg


Particolarità:

- adjustable follow-up time: 10 sec to 3 min.
- to be connected on secondary side between LED 24V transformer and LED 24V luminaire (max. 60W)

Perforazione



13mm



N. articolo:
21703230202

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Classe di protezione	Collegamento	Diametro foro
61500051011	Mini Motion Sensor PIR 3	SK3	LED-Trafo DC 24V	-
20870070011	Radio sensor head PIR 3 matt chrome	-	-	-
61500051021	Mini Motion Sensor PIR 4 60W with 2 solder bridges	-	LED-Trafo DC 24V	-
21703230102	Mini Motion Sensor PIR 1S	SK2	220 - 240V / 50 - 60Hz	13mm
21703230202	Mini Motion Sensor PIR 2S	SK3	LED-Trafo DC 24V	13mm

