Basic Side-Tape

IP 20 | LED 24 | Configurador

Self-adhesive, 90° lateral radiation LED Basic Side-Tape 5m 600 LED 40W ww

Descripción:
Flexible LED tape on roll, colour appearance warm white approx. 3000 K with lateral radiation, quick and easy installation due to the already applied double-sided 3M adhesive tape, supply cable easy to attach, the tape can be shortened every 50 mm (marks between the LEDs). Afterwards the tape can be reconnected without soldering with the connecting clip or the cables, accessories available: dim-controller with remote control , 1-10V, DALI, ZigBee, Sonar or WiFi control

Conexión:	LED-Trafo DC 24 V
Vida útil:	L70/B10 >= 50.000 h
Lichtfarbe:	3000 K blanco cálido
Ausstrahlungswinkel:	95°
Eficiencia energética:	LED 114 lm/W; luminaire: 690 lm/m (86 lm/W)
Energieeffizienzklasse:	G
Reproducción de colores:	Ra/CRI >= 80
Zeichen:	CE, MM, IP20, SK III
EAN-Nr.:	4051268169134
Gewicht:	0,08 kg

Particularidades:
- illuminated direction 90° turned
- max. 6 m on one supply cable
- quick and easy installation due to double-sided adhesive tape
- tapes can be shortened at 50 mm intervals according to the marks on the front side
- afterwards the tapes can be reconnected without soldering with the connecting clips or cables
- the power (W) of partial sections cannot be calculated linearly, please refer to the configurator!

Basic Side-Tape



95°	Ø	ww	nw
0,5m	535	1516 lx	1532 lx
1,0m	1070	379 lx	383 lx
1,5m	1605	168 lx	170 lx
2,0m	2140	95 lx	96 lx
2,5m	2675	61 lx	61 lx



N.° de artículo:
20202800202

artículo disponible en stock

Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.° de artículo	Denominación	Color de la luz
20202800202	LED Basic Side-Tape 5m 600 LED 40W ww	3000 K blanco cálido
20202800203	LED Basic Side-Tape 5m 600 LED 40W nw	4000 K blanco neutro

N.º de artículo: 20202800202

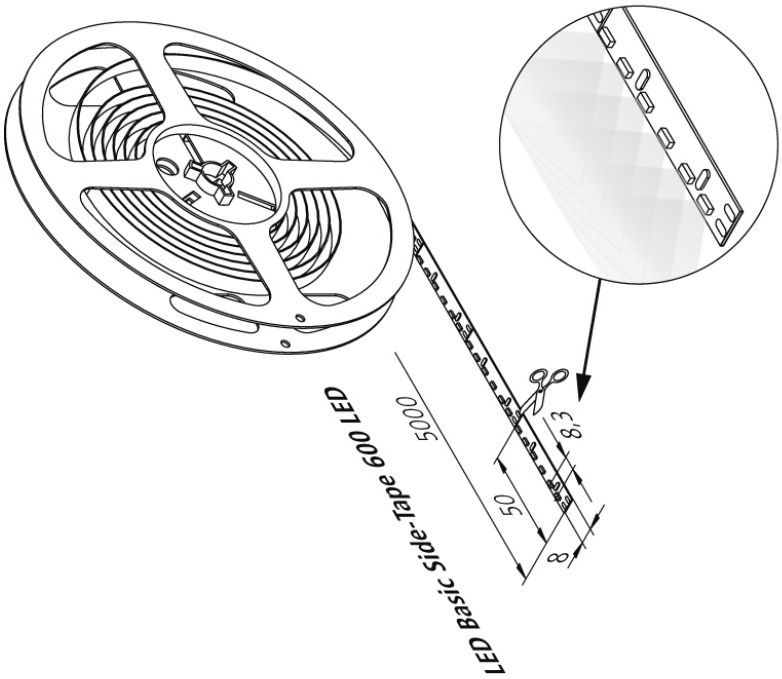

cable de conexión



cable de interconexión



clip de conexión