


Dynamic FAQ 68



Flat metal recessed luminaire square with adjustable colour appearance Dynamic FAQ 68-LED 3W black

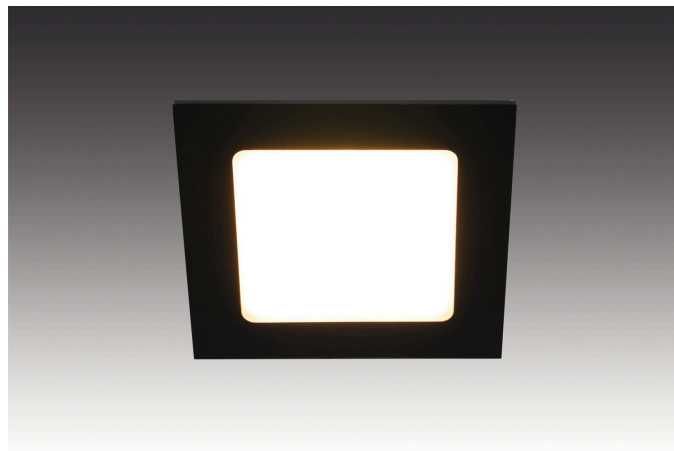

Description:

LED recessed spotlight with planar light, metal housing, pluggable supply cable 2.5m with Dynamic-plug, colour appearance adjustable between approx. 2700K and 5000K, quick and easy installation with snap-in hooks, optional accessories: dim controller with remote control, Alexa, WiFi, DALI, ZigBee, Casambi, sonar or 1-10V dimmer, mounting spring for a secure hold in lightweight ceilings

Connection: LED-Trafo DC 24 V
Life: L70/B10 >= 60.000 h
Light colour: 2700 – 5000 K (Dynamic) adjustable
Beam angle: 110°
Energy efficiency: LED: 120 lm/W; luminaire: 225 lm (75 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 93
Symbols: CE, MM, IP44, SK III
EAN-No.: 4051268216944
Weight: 0,097 kg

Special features:

- housing in metal construction
- flush mounting in 16 mm panels
- no visible luminous spots
- colour appearance adjustable between 2700K (xw) and 5000K (cw)


Dynamic FAQ 68

	110°	Ø	xw	nw	cw
0,5m		620	336 lx	352 lx	364 lx
1,0m		1240	84 lx	88 lx	91 lx
1,5m		1860	37 lx	39 lx	40 lx
2,0m		2480	21 lx	22 lx	23 lx
2,5m		3100	13 lx	14 lx	15 lx

Drilling hole



68mm



Order number:
20203195003

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing
20203195003	Dynamic FAQ 68-LED 3W black	black
20203195008	Dynamic FAQ 68-LED 3W stainless steel look	stainless steel

