

## Zoom



Focusable aluminium showcase spot LED Zoom 1,0W ww anodized aluminium



### Description:

rotate and swivel LED spot, shielding angle adjustable from 9 to 50°, height up 300mm continuously adjustable, metal housing, colour appearance warm white approx. 3000K, connecting cable 2,5m with LED 24 plug, to operate with 350mA transformer (double output)

**Connection:** LED-Trafo DC 350 mA  
**Life:** L90/B10 >= 35.000 h  
**Light colour:** 3000 K warm white  
**Beam angle:** 9° - 50°  
**Energy efficiency:** LED: 112 lm/W; luminaire: 50 lm (50 lm/W)  
**Energy efficiency class:** G  
**Colour rendering:** Ra/CRI >= 90  
**Symbols:** CE, MM, IP20, SK III  
**EAN-No.:** 4051268193344  
**Weight:** 0,088 kg

### Special features:

- height infinitely variable up to 300 mm
- 355° rotating and swiveling by 90°
- adjustable beam angle 9 to 50°


### Zoom

	9°-50°	Ø	350mA
0,5m		100-410	6300-432 lx
1,0m		200-820	1575-108 lx
1,5m		300-1230	700-48 lx
2,0m		400-1640	394-27 lx
2,5m		500-2050	252-17 lx

### Drilling hole



10,5mm

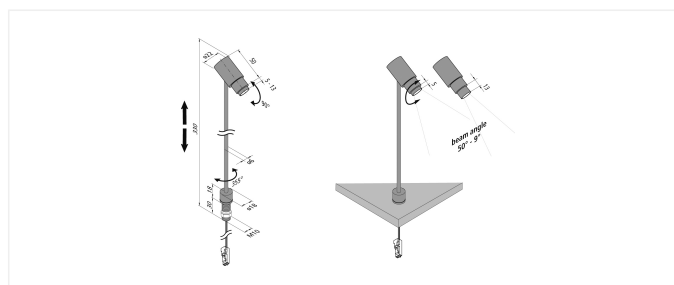

**Order number:**  
20202990102

limited availability

## available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
20202990102	LED Zoom 1,0W ww anodized aluminium	anodized aluminium	3000 K warm white
20202990103	LED Zoom 1,0W nw anodized aluminium	anodized aluminium	4000 K neutral white
20202990302	LED Zoom 1,0W ww black	black	3000 K warm white
20202990303	LED Zoom 1,0W nw black	black	4000 K neutral white

