


EcoLite F HO+



High-efficiency 230 V surface-mounted linear light with area lighting EcoLite F HO+ 300mm 4,5W ww

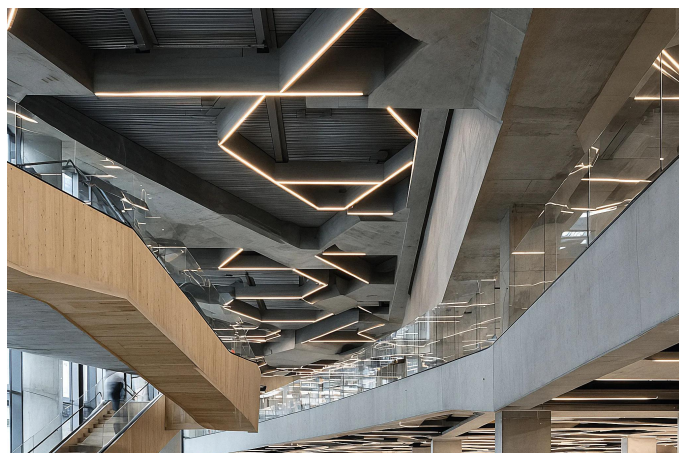

Description:

Very compact LED-Light for 230 V, small rigid connector for minimum spacing between luminaires, easy installation using the included clip mounting, light colour warm white approx. 3000 K, optional accessories such as horizontal connection or interconnection cable. Light colour: 3000 K warm white. Incl. Mounting clip.

Connection: 220 - 240V / 50 - 60Hz

Light colour: 3000K Warm white

Beam angle: 138°

Energy efficiency: LED: 195 lm/W; Leuchte: 2161 lm/m (147 lm/W)

Symbols: IP20, SK II

Weight: 0,08 kg

Special features:

- Rigid connector for minimum spacing between luminaires
- KfW-Förderung possible
- Light colour: 3000 K warm white
- Incl. Mounting clip
- Incl. Connection coupler
- Design: Linear-Light
- 220–240 V / 50–60 Hz
- Protection rating: IP20

EcoLite F HO+

	138°	Ø	ww	nw
0,5m		2605	2036 lx	2180 lx
1,0m		5210	509 lx	545 lx
1,5m		7815	226 lx	242 lx
2,0m		10420	127 lx	136 lx
2,5m		13025	81 lx	87 lx

Order number:
20203261102

limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
20203261102	EcoLite F HO+ 300mm 4,5W ww	3000K Warm white
20203261103	EcoLite F HO+ 300mm 4,5W nw	4000K Neutral white
20203261202	EcoLite F HO+ 600mm 8,5W ww	3000K Warm white
20203261203	EcoLite F HO+ 600mm 8,5W nw	4000K Neutral white
20203261302	EcoLite F HO+ 900mm 12,5W ww	3000K Warm white
20203261303	EcoLite F HO+ 900mm 12,5W nw	4000K Neutral white
20203261402	EcoLite F HO+ 1150mm 16,5W ww	3000K Warm white
20203261403	EcoLite F HO+ 1150mm 16,5W nw	4000K Neutral white
20203261502	EcoLite F HO+ 1440mm 21,5W ww	3000K Warm white
20203261503	EcoLite F HO+ 1440mm 21,5W nw	4000K Neutral white