

HV FR 68



LED-light with homogeneous area lighting for 230 V HV FR 68-LED 3W ww matt chrome



Description:

LED-Recessed spotlight for 230 V with Area light, Plastic housing, Connection cable 2 m with HVLCS plug, light colour warm white approx. 3000 K, Quick and easy installation using Snap hooks, optional accessories: Distributor and Recessed sockets. With easy-to-install HVLCS-Connector system (Drill hole Ø 8 mm) and Clamping ribs for convenient, quick Recessed installation.

Connection: 220 - 240V / 50 - 60Hz

Light colour: 3000K Warm white

Beam angle: 110°

Energy efficiency: LED: 129 lm/W; Leuchte: 200 lm/m (67 lm/W)

Symbols: IP20, SK II

Weight: 0,1 kg

Special features:

- Integriertes Vorschaltgerät
- With easy-to-install HVLCS-Connector system (Drill hole Ø 8 mm) and Clamping ribs for convenient, quick Recessed installation
- Recommended Phases-Dimmer: Busch-Jaeger 6523U-102 or Sygonix 33594C
- Light colour: 3000 K warm white
- Connection cable 2 m with HVLCS plug
- Recommended Phases-Dimmer: Busch-Jaeger 6523U or Sygonix 33594C
- Design: Wide-beam spotlight >80°
- 220-240 V / 50-60 Hz
- Connector system: HVLCS
- Protection rating: IP20
- Dimmable with compatible control
- Housing colour: Matt chrome


HV FR 68

	110°	Ø	ww	nw
0,5m		1428	340 lx	348 lx
1,0m		2856	85 lx	87 lx
1,5m		4284	38 lx	39 lx
2,0m		5713	21 lx	22 lx
2,5m		7141	14 lx	14 lx

Drilling hole



68mm

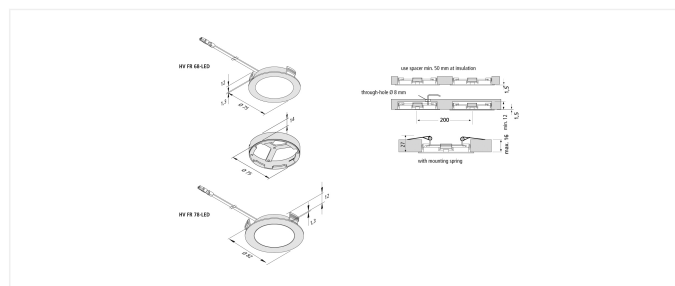

Order number:
61002210206

limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
61002210206	HV FR 68-LED 3W ww matt chrome	3000K Warm white
61002210208	HV FR 68-LED 3W ww stainless-steel look	3000K Warm white
61002210306	HV FR 68-LED 3W nw matt chrome	4000K Neutral white
61002210308	HV FR 68-LED 3W nw stainless-steel look	4000K Neutral white

