

SR 45



Flat, Swivelling LED recessed light SR 45-LED 4,8W ww stainless-steel look



Description:

Pivotable LED-Recessed spotlight, Metal housing, Connection cable 0,2 m with LED 350-Plug, Quick and easy installation using Spring terminals, optional accessories: dimmable Transformer for Phase-cut dimmer or 1-10 V Dimmer, light colour warm white approx. 3000 K, pivotable in two Directions by per 20°.

Connection: LED-Trafo DC 350mA

Light colour: 3000K Warm white

Beam angle: 40°

Energy efficiency: LED: 138 lm/W; Leuchte: 650 lm/m (112 lm/W)

Symbols: IP44, SK III

Weight: 0,05 kg

Special features:

- On both sides pivotable by 20°
- Metal housing
- Light colour: 3000 K warm white
- Connection cable 0,2 m with LED 350-Plug
- Design: Spot 760°
- LED Transformer DC 350 mA
- Connector system: LED 350
- Protection rating: IP44
- Dimmable with compatible control
- Adjustable version
- Housing colour: Stainless-steel look


SR 45

40°	Ø	ww	nw
0,5m	364	4580 lx	4924 lx
1,0m	728	1145 lx	1231 lx
1,5m	1092	509 lx	547 lx
2,0m	1456	286 lx	308 lx
2,5m	1820	183 lx	197 lx

Drilling hole



45mm

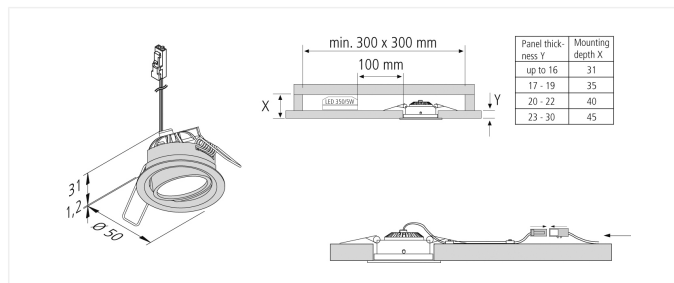

Order number:
20202570802

article in stock



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
20202570102	SR 45-LED 4,8W ww white	3000K Warm white
20202570802	SR 45-LED 4,8W ww stainless-steel look	3000K Warm white
20202570103	SR 45-LED 4,8W nw white	4000K Neutral white
20202570803	SR 45-LED 4,8W nw stainless-steel look	4000K Neutral white

