

Pipe F



360° rotatable, homogeneous aluminium over cabinet luminaire LED Pipe F 310mm 5,8W nw



Description:

Rotating, round LED surface-mounted luminaire with homogeneous planar light, housing aluminum, supply cable 25mm with LED 24 plug and connecting cable 25mm with LED 24 socket, easy installation with enclosed screws, colour appearance nw (neutral white) approx. 4000K, optional accessories: magnet holding clip, dim controller with remote control, DALI or 1-10V dim controller with remote control, DALI or 1-10V


Connection: LED-Trafo DC 24V
Life: L70/B10 >= 60.000h
Light colour: 4000K neutral white
Beam angle: 120°
Energy efficiency: LED 107 lm/W; luminaire: 1100 lm/m (51 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 95
Symbols: CE, MM, IP20, SK III
EAN-No.: 4,05E+12
Weight: 0,065 kg

Special features:

- LEDs rotating 360°, max. 60W per supply cable, assembly with screws in wood or with magnet holding clip as accessory, no visible luminous spots

Pipe F

	120°	Ø	ww	nw
0,5m		650	1324 lx	1360 lx
1,0m		1300	331 lx	340 lx
1,5m		1950	147 lx	151 lx
2,0m		2600	83 lx	85 lx
2,5m		3250	53 lx	54 lx

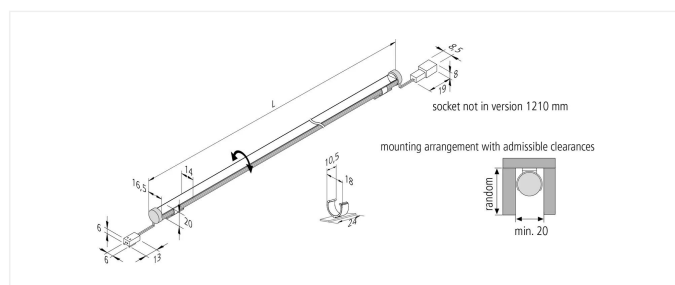

Order number:
61001610103

limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
61001610102	LED Pipe F 310mm 5,8W ww	3000K warm white
61001610202	LED Pipe F 610mm 11,4W ww	3000K warm white
61001610302	LED Pipe F 910mm 17,0W ww	3000K warm white
61001611402	LED Pipe F 1210mm 22,3W ww	3000K warm white
61001610103	LED Pipe F 310mm 5,8W nw	4000K neutral white
61001610203	LED Pipe F 610mm 11,4W nw	4000K neutral white
61001610303	LED Pipe F 910mm 17,0W nw	4000K neutral white
61001611403	LED Pipe F 1210mm 22,3W nw	4000K neutral white

