

Dynamic Top-Stick FK



Aluminium surface mounted luminaire with adjustable colour appearance Dynamic LED Top-Stick FK 1200mm 19,2W



Description:

Flat LED under cabinet luminaire with homogeneous planar light, housing aluminum, supply cable 2.5m with dynamic plug and cable outlet to the rear, colour appearance adjustable between approx. 2700K and 6000K, incl. 250mm self-adhesive white cable duct, if the luminaire is mounted centrally above the kitchen worktop and the cable has to be led back under the wall cabinet towards the back of the niche. Optional accessories: dynamic controller with remote control, DALI or WiFi to dim and adjust the colour appearance


Connection: LED-Trafo DC 24 V
Life: L70/B10 >= 50.000 h
Light colour: 2700 – 5000 K (Dynamic) adjustable
Beam angle: 100°
Energy efficiency: LED 129 lm/W; luminaire: 830 lm/m (52 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 80
Symbols: CE, MM, IP20, SK III
EAN-No.: 4051268130769
Weight: 0,56 kg

Special features:

- only 12 mm thickness
- no visible luminous spots
- colour appearance adjustable between approx. 2700 K (xw) and 5000 K (cw)

Dynamic Top-Stick F

| | 100° | Ø | xw | nw | cw |
|------|------|------|---------|---------|---------|
| 0,5m | | 610 | 1848 lx | 1980 lx | 2116 lx |
| 1,0m | | 1220 | 462 lx | 495 lx | 529 lx |
| 1,5m | | 1830 | 205 lx | 220 lx | 235 lx |
| 2,0m | | 2440 | 116 lx | 124 lx | 132 lx |
| 2,5m | | 3050 | 74 lx | 79 lx | 85 lx |

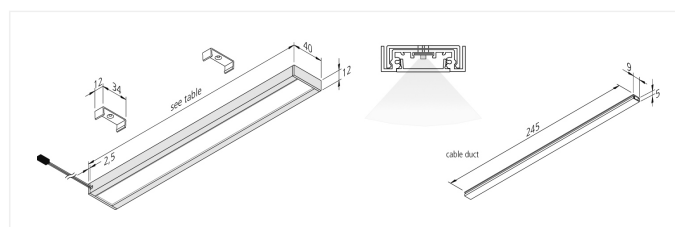

Order number:
61001844401

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

| article number | description |
|----------------|---------------------------------------|
| 61001844101 | Dynamic LED Top-Stick FK 450mm 6,8W |
| 61001844201 | Dynamic LED Top-Stick FK 600mm 9,5W |
| 61001844301 | Dynamic LED Top-Stick FK 900mm 14,4W |
| 61001844401 | Dynamic LED Top-Stick FK 1200mm 19,2W |

