

Twin-Stick 2

Pluggable linear luminaire 24V DC LED Twin-Stick 2 300mm 72 LED 4,4W nw



Description:

Pluggable LED Stick without dark zones in an aluminum profile, light color neutral white approx. 4000K, easy installation with attached clips, simply connect the supply cable and connect the LED Sticks up to 2.4m or use one Stick SE (with lateral feeder) for infinite light rows, optional accessories: dimmable transformer with radio remote control or 1-10V dimmer, push-button switch, cover and milled profile for complete installation in wood

Connection: LED-Trafo DC 24V
Life: L70/B10 >= 60.000h
Light colour: 4000K neutral white
Beam angle: 55°
Energy efficiency: LED 98 lm/W; luminaire: 1140 lm/m (78 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 95
Symbols: CE, MM, UL, IP20, SK III
EAN-No.: 4,05E+12
Weight: 0,068 kg


Special features:

- maximum 36W or 2,4m per supply cable
- without dark zones



Twin-Stick 2

	55°	Ø	ww	nw	cw
0,5m		450	2600 lx	2820 lx	3120 lx
1,0m		900	650 lx	705 lx	780 lx
1,5m		1350	289 lx	313 lx	347 lx
2,0m		1800	163 lx	176 lx	195 lx
2,5m		2250	104 lx	113 lx	125 lx

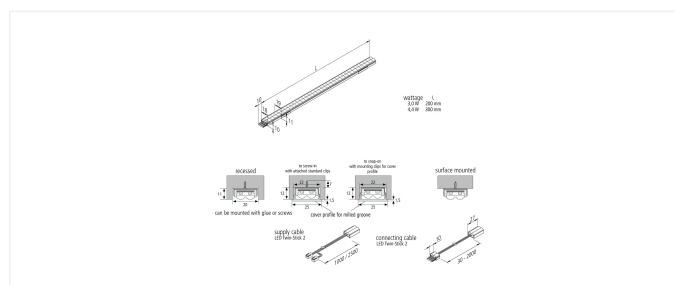


Order number:
20202123305

article in stock


available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour rendering	light colour
20202123202	LED Twin-Stick 2 200mm 48 LED 3,0W ww	Ra/CRI >= 95	3000K warm white
20202123302	LED Twin-Stick 2 300mm 72 LED 4,4W ww	Ra/CRI >= 95	3000K warm white
20202123205	LED Twin-Stick 2 200mm 48 LED 3,0W nw	Ra/CRI >= 95	4000K neutral white
20202123305	LED Twin-Stick 2 300mm 72 LED 4,4W nw	Ra/CRI >= 95	4000K neutral white
20202123201	LED Twin-Stick 2 200mm 48 LED 3,0W cw	Ra/CRI >= 85	5000K cool white
20202123301	LED Twin-Stick 2 300mm 72 LED 4,4W cw	Ra/CRI >= 85	5000K cool white

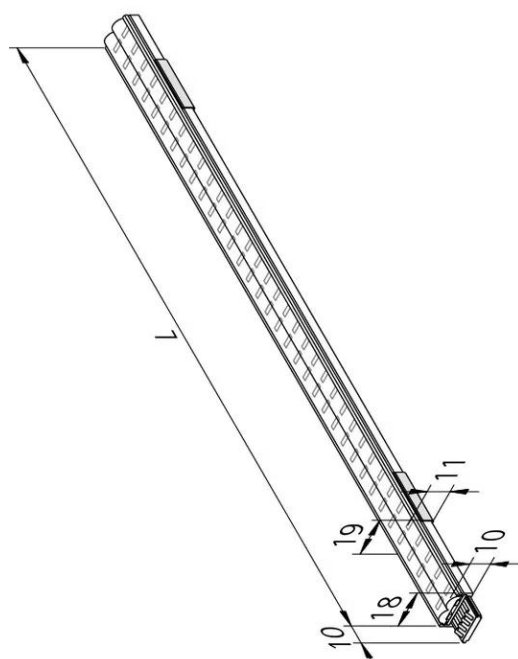


wattage	L
3,0 W	200 mm
4,4 W	300 mm




recessed

can be mounted with glue or screws


to screw-in
with attached standard clips

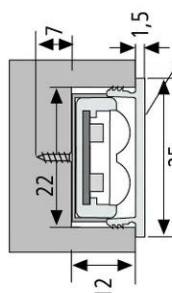

to snap-on
with mounting clips for cover
profile

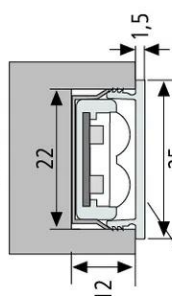


cover profile for milled groove

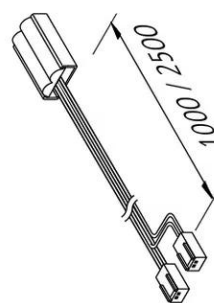

supply cable
LED Twin-Stick 2

connecting cable
LED Twin-Stick 2

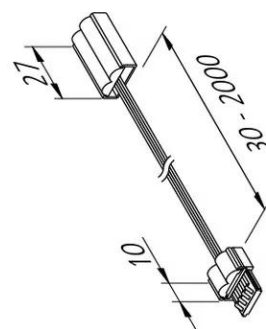

surface mounted

