

Top-Stick H



Powerful aluminium surface mounted luminaire LED Top-Stick H 1210mm 30,0W nw



Description:

Flat LED under-cabinet luminaire, housing anodized aluminium, supply cable 2,5 m with LED 24 plug, colour appearance neutral white appr.4000K, accessories available: dimmable transformer with radio telecontrol or 1-10V Dimmer


Connection:	LED-Trafo DC 24V
Life:	L70/B10 >= 60.000h
Light colour:	4000K neutral white
Beam angle:	100°
Energy efficiency:	LED 113 lm/W; luminaire: 1302 lm/m (52 lm/W)
Energy efficiency class:	G
Colour rendering:	Ra/CRI >= 95
Symbols:	CE, MM, IP20, SK III
EAN-No.:	4,05E+12
Weight:	0,56 kg

Special features:

- only 12mm thickness
- easy mounting with concealed mounting clips
- version HR with reflector for asymmetrical illumination

Top-Stick H

	100°	Ø	ww	nw
0,5m		610	2580 lx	2680 lx
1,0m		1220	645 lx	670 lx
1,5m		1830	287 lx	298 lx
2,0m		2440	161 lx	168 lx
2,5m		3050	103 lx	107 lx

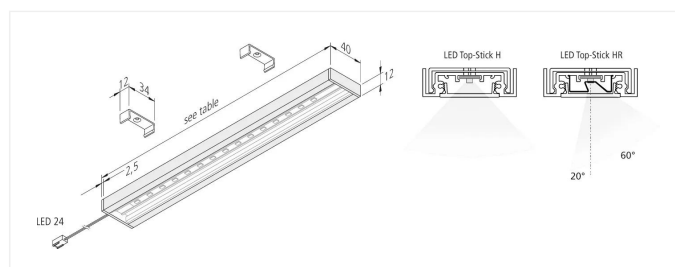

Order number:
61001420401

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	light colour
61001420102	LED Top-Stick H 310mm 7,5W ww	3000K warm white
61001420202	LED Top-Stick H 610mm 15,0W ww	3000K warm white
61001420302	LED Top-Stick H 910mm 22,5W ww	3000K warm white
61001420402	LED Top-Stick H 1210mm 30,0W ww	3000K warm white
61001420101	LED Top-Stick H 310mm 7,5W nw	4000K neutral white
61001420201	LED Top-Stick H 610mm 15,0W nw	4000K neutral white
61001420301	LED Top-Stick H 910mm 22,5W nw	4000K neutral white
61001420401	LED Top-Stick H 1210mm 30,0W nw	4000K neutral white

