

## Q 68 HO



Flat recessed luminaire square set of 3 Q 68-LED HO 4W ww stainless steel



### Descripción:

Square recessed LED spotlight for 68mm bore as set of 3, plastic housing, connecting cable 2.5m with LED 24-plug, incl. 15W transformer, light color warm white approx. 3000K, quick and easy installation with snap-in hooks, optional accessories: mounting spring for a secure hold in lightweight ceilings, surface-mounting ring for installation without mounting hole

**Conexión:** LED-Trafo DC 24V  
**Vida útil:** L70/B10 >= 40.000h  
**Lichtfarbe:** 3000K blanco cálido  
**Ausstrahlungswinkel:** 110°  
**Eficiencia energética:** LED: 113 lm/W; luminaire: 300 lm (75 lm/W)  
**Energieeffizienzklasse:** G  
**Reproducción de colores:** Ra/CRI >= 93  
**Zeichen:** CE, MM, UL, IP44, SK III  
**EAN-Nr.:** 4,05E+12  
**Gewicht:** 0,425 kg

### Particularidades:

- flush mounting in 16mm panels


### R 68 HO / Q 68 HO

	110°	Ø	ww	nw
0,5m		620	532 lx	532 lx
1,0m		1240	133 lx	133 lx
1,5m		1860	59 lx	59 lx
2,0m		2480	33 lx	33 lx
2,5m		3100	21 lx	21 lx

### Agujero



68mm

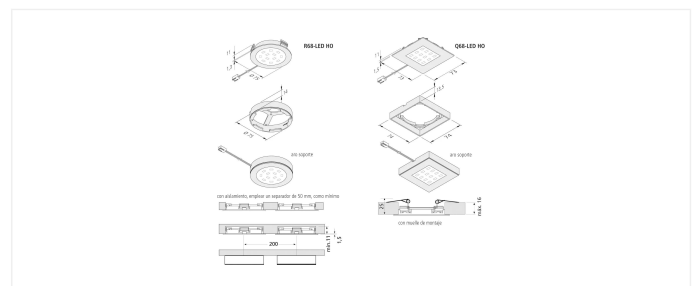

N.º de artículo:  
61054933802

disponibilidad restringida probable

## Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

N.º de artículo	Denominación	Color de la luz
61054933802	set of 3 Q 68-LED HO 4W ww stainless steel	3000K blanco cálido
61054933803	set of 3 Q 68-LED HO 4W nw stainless steel	4000K blanco neutro

