

## IN-Stick SF



12mm flat aluminium recessed luminaire LED IN-Stick SF 830mm 15,1W ww




### Descripción:

Lean recessed LED luminaire with homogeneous planar light for milled groove 20mm wide and 12mm deep, housing aluminum, supply cable 2.5m with LED 24 plug, colour appearance ww (warm white) approx. 3000K, optional accessories: dim controller with remote control, DALI or 1-10V

**Conexión:** LED-Trafo DC 24 V  
**Vida útil:** L70/B10 >= 50.000 h  
**Lichtfarbe:** 3000 K warm white  
**Ausstrahlungswinkel:** 100°  
**Eficiencia energética:** LED 120 lm/W; luminaire: 842 lm/m (45 lm/W)  
**Energieeffizienzklasse:** G  
**Reproducción de colores:** Ra/CRI >= 93  
**Zeichen:** CE, MM, UL, IP44, SK III  
**EAN-Nr.:** 4051268120364  
**Gewicht:** 0,21 kg


### Particularidades:

- only 12 mm depth of the groove
- no visible luminous spots

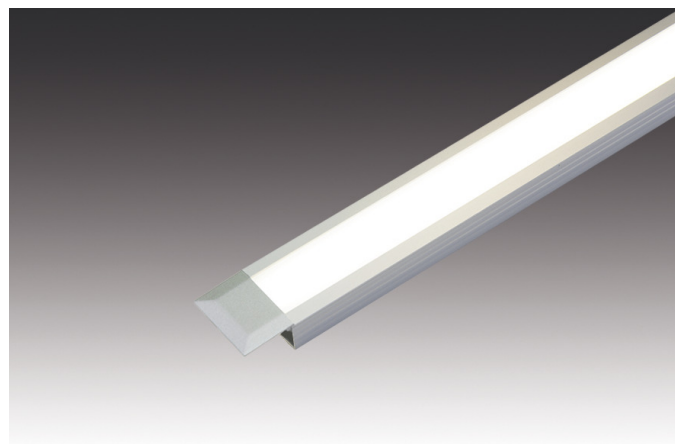

### IN-Stick SF

|      | 100° | Ø    | ww      | nw      |
|------|------|------|---------|---------|
| 0,5m |      | 560  | 1184 lx | 1268 lx |
| 1,0m |      | 1120 | 296 lx  | 317 lx  |
| 1,5m |      | 1680 | 132 lx  | 141 lx  |
| 2,0m |      | 2240 | 74 lx   | 79 lx   |
| 2,5m |      | 2800 | 47 lx   | 51 lx   |

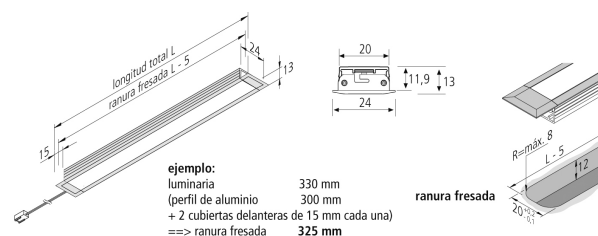

N.º de artículo:  
61001550502


disponibilidad restringida probable



## Versiones disponibles

Elija uno de los siguientes modelos. El seleccionado actualmente está resaltado.

| N.º de artículo    | Denominación                          | Color de la luz             |
|--------------------|---------------------------------------|-----------------------------|
| 61001550102        | LED IN-Stick SF 330mm 5,8W ww         | 3000 K blanco cálido        |
| 61001550302        | LED IN-Stick SF 530mm 9,6W ww         | 3000 K blanco cálido        |
| <b>61001550502</b> | <b>LED IN-Stick SF 830mm 15,1W ww</b> | <b>3000 K blanco cálido</b> |
| 61001550702        | LED IN-Stick SF 1130mm 20,4W ww       | 3000 K blanco cálido        |
| 61001550103        | LED IN-Stick SF 330mm 5,8W nw         | 4000 K blanco neutro        |
| 61001550303        | LED IN-Stick SF 530mm 9,6W nw         | 4000 K blanco neutro        |
| 61001550503        | LED IN-Stick SF 830mm 15,1W nw        | 4000 K blanco neutro        |
| 61001550703        | LED IN-Stick SF 1130mm 20,4W nw       | 4000 K blanco neutro        |

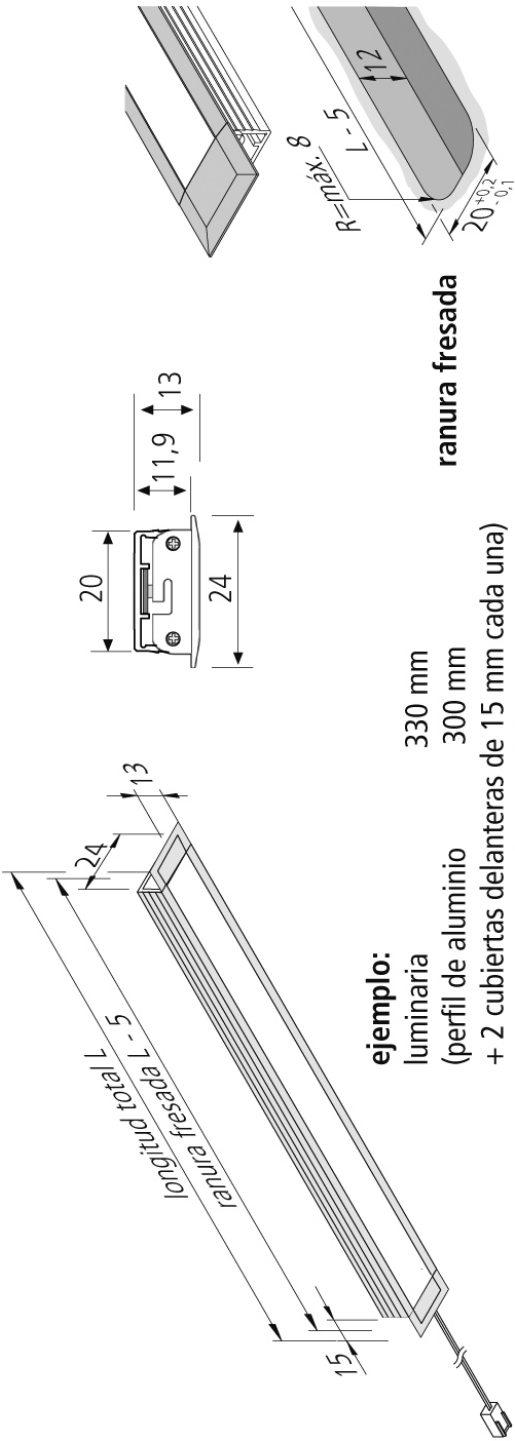

**ejemplo:**

luminaria  
(perfil de aluminio  
+ 2 cubiertas delanteras de 15 mm cada una)  
==> ranura fresada

330 mm  
300 mm  
325 mm

**ranura fresada**

