

HV FR 68- / HV FR 78



Flat recessed luminaire 230V HV FR 68-LED 3W ww matt chrome



Descrizione:

LED recessed spotlight for 230V with planar light, plastic housing, connecting cable 2m with HVLCS-plug, light color warm white approx. 3000K, quick and easy installation with snap-in hooks, optional accessories: distributor and flush-type socket

Collegamento: 220 - 240V / 50 - 60Hz

Durata: L70/B10 >= 40.000h

Lichtfarbe: 3000K bianco caldo

Ausstrahlungswinkel: 110°

Efficienza energetica: LED: 129 lm/W; luminaire: 200 lm (67 lm/W)

Energieeffizienzklasse: G

Resa del colore: Ra/CRI >= 84

Zeichen: CE, MM, IP20, SK II

EAN-Nr.: 4,05E+12

Gewicht: 0,1 kg

Particolarità:

- integrated electronic ballast
- with easy-to-mount HVL CS plug-in system (drill hole ø 8mm) and clamping ribs for fast and easy installation
- recommended phase dimmer: Busch-Jaeger 6523U-102 or Sygonix 33594C


HV FR 68/78

	110°	Ø	ww	nw
0,5m		620	296 lx	296 lx
1,0m		1240	74 lx	74 lx
1,5m		1860	33 lx	33 lx
2,0m		2480	19 lx	19 lx
2,5m		3100	12 lx	12 lx

Perforazione



68mm

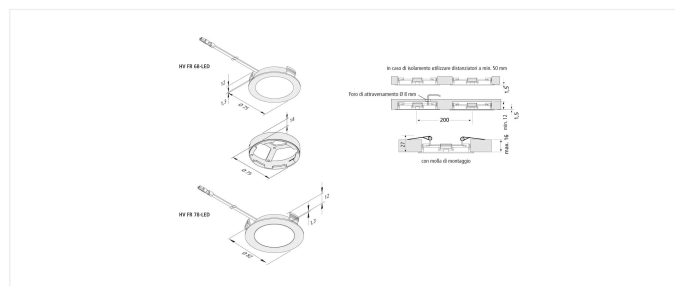

N. articolo:
61002210206

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore esterno	Colore della luce
61002210206	HV FR 68-LED 3W ww matt chrome	Cromato opaco	3000K bianco caldo
61002210208	HV FR 68-LED 3W ww stainless steel look	Aspetto in acciaio inossidabile	3000K bianco caldo
61002210306	HV FR 68-LED 3W nw matt chrome	Cromato opaco	4000K bianco neutro
61002210308	HV FR 68-LED 3W nw stainless steel look	Aspetto in acciaio inossidabile	4000K bianco neutro

