

Dynamic FR 215



Powerful recessed ceiling luminaire with adjustable colour appearance Dynamic FR 215-LED 25W white



Descrizione:

LED recessed spotlight with planar light, metal housing, connecting cable 2.5m with dynamic plug, light color adjustable between approx. 2700K and 5000K, quick and easy mounting by spring terminals, control via radio remote control, DALI or WiFi controller

Collegamento: LED-Trafo DC 24 V
Durata: L70/B10 >= 60.000 h
Lichtfarbe: 2700 – 5000 K (Dynamic) regolabile
Ausstrahlungswinkel: 100°
Efficienza energetica: LED: 124 lm/W; luminaire: 1700 - 2500 lm (68 - 100 lm/W)
Energieeffizienzklasse: F
Resa del colore: Ra/CRI >= 90
Zeichen: CE, MM, IP20, SK III
EAN-Nr.: 4051268146784
Gewicht: 0,73 kg

Particolarità:

- suitable for mounting in metal sheet
- no visible luminous spots
- colour appearance adjustable between 2700K (xw) and 5000K (cw)


Dynamic FR 215

	100°	Ø	xw	nw	cw
0,5m		600	2940 lx	3640 lx	4360 lx
1,0m		1200	735 lx	910 lx	1090 lx
1,5m		1800	327 lx	404 lx	484 lx
2,0m		2400	184 lx	228 lx	273 lx
2,5m		3000	118 lx	146 lx	174 lx

Perforazione



210-220mm

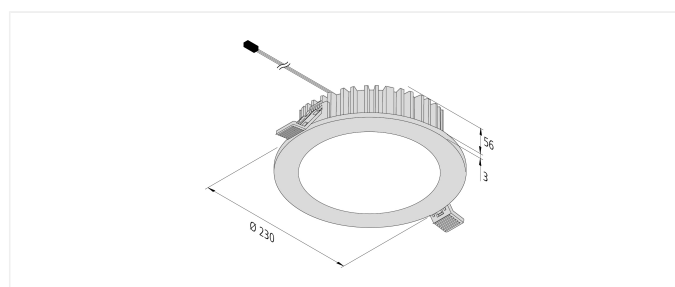

N. articolo:
20202124001

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione
20202124001	Dynamic FR 215-LED 25W white

