


SIL-LED 2



Compact furniture drawer luminair with IR sensor SIL-LED 2 417mm 1,3W nw

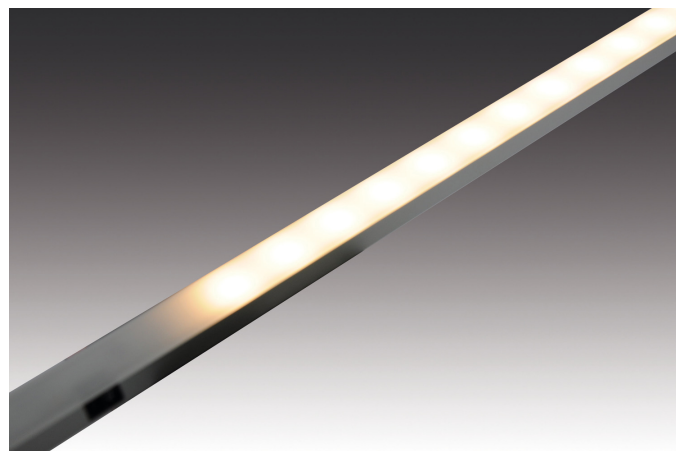

Descrizione:

Interior cabinet luminaire with touchless sensor switch, supply cable 2.5 m with LED 24 plug, colour appearance nw (neutral white) approx. 4000K, incl. mounting clip for lateral attachment in drawers and 500mm self-adhesive cable duct


Collegamento: LED-Trafo DC 24 V
Durata: L70/B10 >= 50.000 h
Lichtfarbe: 4000 K bianco neutro
Ausstrahlungswinkel: 110°
Efficienza energetica: LED: 140 lm/W; lampada: 330 lm/m (83 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 80
Zeichen: CE, MM, IP20, SK III
EAN-Nr.: 4051268230124
Gewicht: 0,24 kg

Particolarità:

- interruttore a sensore senza contatto integrato, con "Soft On" e "Soft Off"
- clip di montaggio in allegato per il fissaggio laterale nei cassetti

SIL-LED 2

	110°	Ø	567mm
0,5m		610	268 lx
1,0m		1220	67 lx
1,5m		1830	30 lx
2,0m		2440	17 lx
2,5m		3050	11 lx



N. articolo:
61001213101

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione
61001213101	SIL-LED 2 417mm 1,3W nw
61001213201	SIL-LED 2 467mm 1,7W nw
61001213301	SIL-LED 2 567mm 2,1W nw
61001213401	SIL-LED 2 767mm 2,9W nw
61001213501	SIL-LED 2 867mm 3,4W nw
61001213601	SIL-LED 2 967mm 3,8W nw
61001213701	SIL-LED 2 1167mm 4,7W nw
61001214101	SIL-LED 2 411mm 1,3W nw
61001214201	SIL-LED 2 461mm 1,7W nw
61001214301	SIL-LED 2 561mm 2,1W nw
61001214401	SIL-LED 2 761mm 2,9W nw
61001214501	SIL-LED 2 861mm 3,4W nw
61001214601	SIL-LED 2 961mm 3,8W nw
61001214701	SIL-LED 2 1161mm 4,7W nw

