

Dynamic Line

Self-adhesive, adjustable, pluggable Dynamic LED Line 2000mm 144 LED 7,50W



Descrizione:

Flexible, pluggable LED stripes, colour appearance adjustable between appr. 2700K and 5000K, quick and easy installation with double-sided adhesive tape, simply connect the supply cable and connect the strips up to 6m, strips can be shortened every 167mm (marks between the LEDs), accessories available: Dynamic controller with remote control, DALI or WiFi App for dimming and adjusting the light colour, Profile for glass shelves to stick on glass shelves, corner profile, mounting profile, cover profile, milled profile or mounting profile


Collegamento: LED-Trafo DC 24V
Durata: L70/B10 >= 60.000h
Lichtfarbe: 2700 - 5000K (Dynamic) adjustable
Ausstrahlungswinkel: 120°
Effizienz energetica: LED 98 lm/W; luminaire: 300 lm/m (80 lm/W)
Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 80
Zeichen: CE, MM, IP20, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,066 kg

Particolarità:

- max. 6m or 18 x 333mm Line on one supply cable, quick and easy installation due to double-sided adhesive tape and integrated plug and socket of the Line (direct plug-in without connecting cable), Lines can be shortened at 167mm according to the marks on the front side, remains can't be used

Dynamic LED Line

	120°	Ø	ww	nw	cw
0,5m		600	616 lx	644 lx	680 lx
1,0m		1200	154 lx	161 lx	170 lx
1,5m		1800	68 lx	72 lx	76 lx
2,0m		2400	39 lx	40 lx	43 lx
2,5m		3000	25 lx	26 lx	27 lx

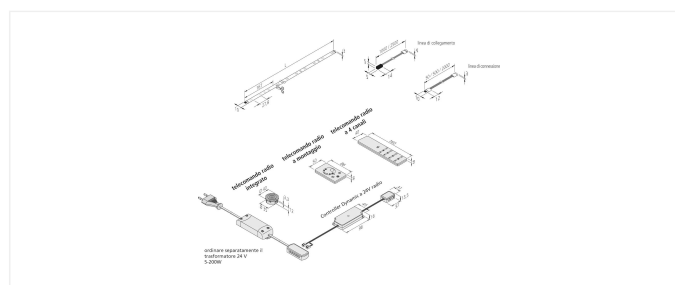

N. articolo:
20202510301

eventualmente disponibili in quantità limitata

Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Dimmerabile	Angolo di irradiazione	Tipo di struttura	Resa del colore	Collegamento	Durata	Colore della luce	Efficienza energetica
20202510101	Dynamic LED Line 333mm 24 LED 1,25W	Sì	120°	Luce lineare	Ra/CRI >= 80	LED-Trafo DC 24V	L70/B10 >= 60.000h	2700 - 5000K (Dynamic) regolabile	LED 98 lm/W; luminaire: 300 lm/m (80 lm/W)
20202510201	Dynamic LED Line 1000mm 72 LED 3,75W	Sì	120°	Luce lineare	Ra/CRI >= 80	LED-Trafo DC 24V	L70/B10 >= 60.000h	2700 - 5000K (Dynamic) regolabile	LED 98 lm/W; luminaire: 300 lm/m (80 lm/W)
20202510301	Dynamic LED Line 2000mm 144 LED 7,50W	Sì	120°	Luce lineare	Ra/CRI >= 80	LED-Trafo DC 24V	L70/B10 >= 60.000h	2700 - 5000K (Dynamic) regolabile	LED 98 lm/W; luminaire: 300 lm/m (80 lm/W)
21529060001	Connecting cable LED RGB-, Power-, Dynamic-Line 50mm	No	-	-	-	-	-	-	-
21529062001	Connecting cable LED RGB-, Power-, Dynamic-Line 2000mm	No	-	-	-	-	-	-	-
21529060501	Connecting cable LED RGB-, Power-, Dynamic-Line 500mm	No	-	-	-	-	-	-	-
21534061001	Supply cable Dynamic LED Line 1000mm	No	-	-	-	LED-Trafo DC 24V	-	-	-

