


## SR 68



Swivel and tilt recessed ceiling spotlight for 68-80mm ceiling cut-out SR 68-LED Set 7,5W 30° nw matt chrome

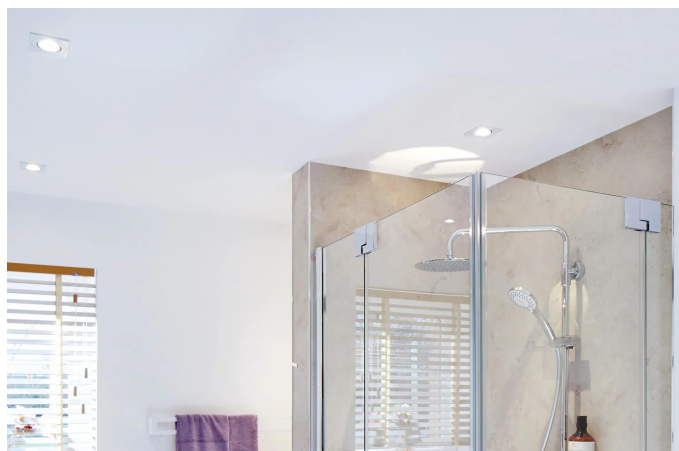

### Descrizione:

Swiveling LED recessed spotlight, metal housing, incl. dimmable LED transformer with terminal clamp for 230V with integrated through-wiring, quick and easy installation by spring clips, light color neutral white approx. 4000K, gimbal swivel by 20° each, dimmable with phase dimmer (recommended: Busch Jaeger 6513U or Jung 225TDE)

**Collegamento:** LED-Trafo DC 350 / 230 / 700mA

**Durata:** L70/B10 >= 70.000h

**Lichtfarbe:** 4000K bianco neutro

**Ausstrahlungswinkel:** 30°

**Efficienza energetica:** LED: 120 lm/W luminaire 800 lm (107 lm/W incl. transformer)

**Energieeffizienzklasse:** E

**Resa del colore:** Ra/CRI >= 93

**Zeichen:** CE, MM, IP44, UGR<19, SK III

**EAN-Nr.:** 4,05E+12

**Gewicht:** 0,26 kg

### Particolarità:

- swivels and tilts 20° to both sides
- metal casing: incl. round, small transformer for the flat inserted ceiling
- suitable for screen workstations! (UGR < 19)


### SR 68 7,5W

| 30°  | Ø    | xw      | ww      | nw      |
|------|------|---------|---------|---------|
| 0,5m | 250  | 6320 lx | 7640 lx | 8280 lx |
| 1,0m | 500  | 1580 lx | 1910 lx | 2070 lx |
| 1,5m | 750  | 702 lx  | 849 lx  | 920 lx  |
| 2,0m | 1000 | 395 lx  | 478 lx  | 518 lx  |
| 2,5m | 1250 | 253 lx  | 306 lx  | 331 lx  |

### Perforazione



68-74mm (ohne Ring) , 68-84mm (mit Ring)



**N. articolo:**  
61001475301

eventualmente disponibili in quantità limitata

## Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

| N. articolo        | Denominazione                                  | Colore esterno                  | Colore della luce          |
|--------------------|------------------------------------------------|---------------------------------|----------------------------|
| 61001475401        | SR 68-LED Set 7,5W 30° xw matt chrome          | Cromato opaco                   | 2700K bianco extra caldo   |
| 61001476001        | SR 68-LED Set 7,5W 30° xw stainless steel look | Aspetto in acciaio inossidabile | 2700K bianco extra caldo   |
| 61001475701        | SR 68-LED Set 7,5W 30° xw white                | Bianco                          | 2700K bianco extra caldo   |
| 61001475201        | SR 68-LED Set 7,5W 30° ww matt chrome          | Cromato opaco                   | 3000K bianco caldo         |
| 61001475801        | SR 68-LED Set 7,5W 30° ww stainless steel look | Aspetto in acciaio inossidabile | 3000K bianco caldo         |
| 61001475501        | SR 68-LED Set 7,5W 30° ww white                | Bianco                          | 3000K bianco caldo         |
| <b>61001475301</b> | <b>SR 68-LED Set 7,5W 30° nw matt chrome</b>   | <b>Cromato opaco</b>            | <b>4000K bianco neutro</b> |
| 61001475901        | SR 68-LED Set 7,5W 30° nw stainless steel look | Aspetto in acciaio inossidabile | 4000K bianco neutro        |
| 61001475601        | SR 68-LED Set 7,5W 30° nw white                | Bianco                          | 4000K bianco neutro        |
| 61001476201        | SR 68-LED Set 7,5W 30° xw black                | Nero                            | 2700K bianco extra caldo   |
| 61001476101        | SR 68-LED Set 7,5W 30° ww black                | Nero                            | 3000K bianco caldo         |

