

Pipe F



Lampada in alluminio omogenea, ruotabile a 360° LED Pipe F 1210mm 22,3W ww



Descrizione:

Rotating, round LED surface-mounted luminaire with homogeneous planar light, housing aluminum, supply cable 25mm with LED 24 plug and connecting cable 25mm with LED 24 socket, easy installation with enclosed screws, colour appearance ww (warm white) approx. 3000K, optional accessories: magnet holding clip, dim controller with remote control, DALI or 1-10V dim controller with remote control, DALI or 1-10V

Collegamento: LED-Trafo DC 24V
Durata: L70/B10 >= 60.000h
Lichtfarbe: 3000K bianco caldo
Ausstrahlungswinkel: 120°
Efficienza energetica: LED 107 lm/W; Apparecchio: 1100 lm/m (51 lm/W)


Energieeffizienzklasse: G
Resa del colore: Ra/CRI >= 95
Zeichen: CE, MM, IP20, SK III
EAN-Nr.: 4,05E+12
Gewicht: 0,28 kg

Particolarità:

- LED rotabili a 360°
- max. 60W per linea di connessione
- montaggio con viti nel legno o con supporto magnetico come accessorio
- nessun punto luminoso visibile

Pipe F

	120°	Ø	ww	nw
0,5m		650	1324 lx	1360 lx
1,0m		1300	331 lx	340 lx
1,5m		1950	147 lx	151 lx
2,0m		2600	83 lx	85 lx
2,5m		3250	53 lx	54 lx

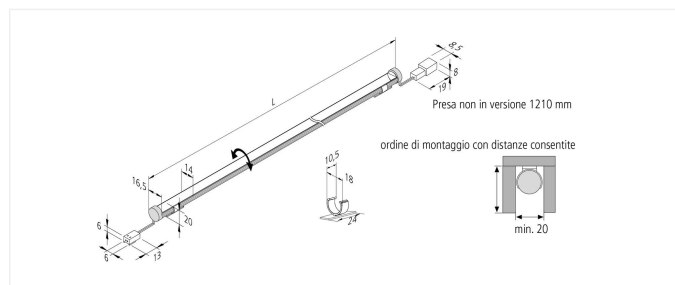

N. articolo:
61001611402

eventualmente disponibili in quantità limitata



Versioni disponibili

Scegli tra le versioni seguenti. Quella attualmente selezionata è evidenziata a colori.

N. articolo	Denominazione	Colore della luce
61001610102	LED Pipe F 310mm 5,8W ww	3000K bianco caldo
61001610202	LED Pipe F 610mm 11,4W ww	3000K bianco caldo
61001610302	LED Pipe F 910mm 17,0W ww	3000K bianco caldo
61001611402	LED Pipe F 1210mm 22,3W ww	3000K bianco caldo
61001610103	LED Pipe F 310mm 5,8W nw	4000K bianco neutro
61001610203	LED Pipe F 610mm 11,4W nw	4000K bianco neutro
61001610303	LED Pipe F 910mm 17,0W nw	4000K bianco neutro
61001611403	LED Pipe F 1210mm 22,3W nw	4000K bianco neutro

